


## LORO-DOPPELR.ATT.ABL.HAUPT-NOT-KOMBI M.B

LORO double pipe parapet drain main-emergency-combi with basin low-laid pipe with adhesive flange for bitumen DN 100

### Description

LORO-X main-emergency combination direct parapet drain with double pipe, series 43 with basin and lowered pipe, with gravity flow, discharge rate main drainage 4.0 l/s at 35 mm water level on the roof and emergency drainage 4.0 l/s at 75 mm, with bonding flange, for bituminous roofing sheets, roof penetration depth 103 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX727, made of steel, hot-dip galvanized, DN100/100




### Article information

|                              |                             |
|------------------------------|-----------------------------|
| EAN Code                     | 4038088090770               |
| ETIM Class                   | EC010400                    |
| Nominal diameter             | DN 100                      |
| Outside measurements (HxWxL) | 480 x 719 x 338 mm          |
| Weight                       | 10,70 Kg (STK)              |
| Product group                | 9                           |
| Customs tariff number        | 73089098                    |
| Material / Color             | Stahl feuerverzinkt, Silber |

### Usage note

Für Wohngebäude bietet LORO ein Silent System mit Haupt- und Notentwässerung als Silent-Freisiegelströmung. Die Hauptentwässerung erfolgt hierbei ebenfalls mit 4,5l/s in die Grundleitung - die Notentwässerung läuft als Speierlösung jedoch direkt über das Überlaufwehr des Sammelkastens.

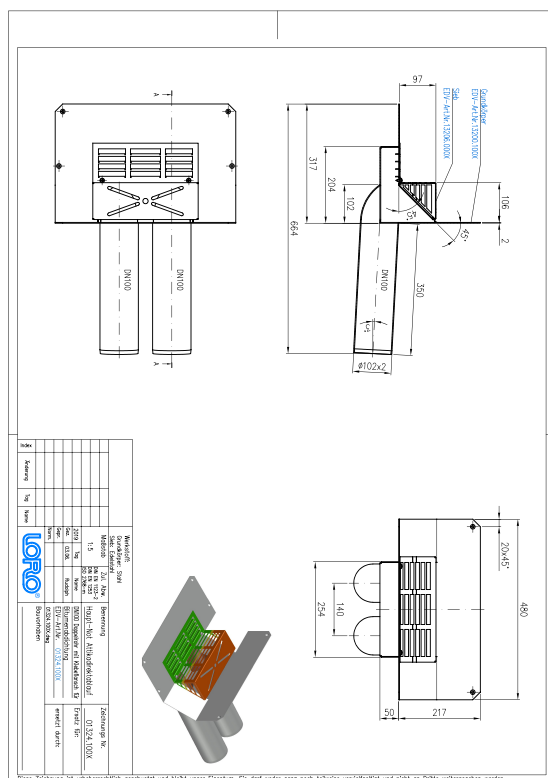

### Downloads



Alles online

[Installation \(PDF\)](#)
[Certificate \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[CAD drawing \(PDF\)](#)
[System data sheet LX 727](#)
[BIM 3D \(STEP\)](#)
[Brochure \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)