# Scheda tecnica del prodotto

LORO_Produkt-Datenblatt_01327.070X_it.pdf
Articolo 01327.070X
29.11.2026, 20:40


## LORO-DOPPELR.ATT.ABL.HAUPT-NOT-KOMBI M.

**LORO-DRAINLET double pipe Attika drain main emergency combination with clamping flange fr plastic weir right DN 70**

### Voce di capitolato

LORO-X main-emergency combination DUOFLUX direct parapet drain with double pipe, series 43 with basin and weir right, for main drainage with gravity flow, discharge rate 2.2 l/s at 35 mm water level on the roof and emergency drainage 3.4 l/s at 75 mm, with clamping flange, as loose and fixed flange construction, for plastic roofing sheets, roof penetration depth 52 mm, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX1156, made of stainless steel, , DN70



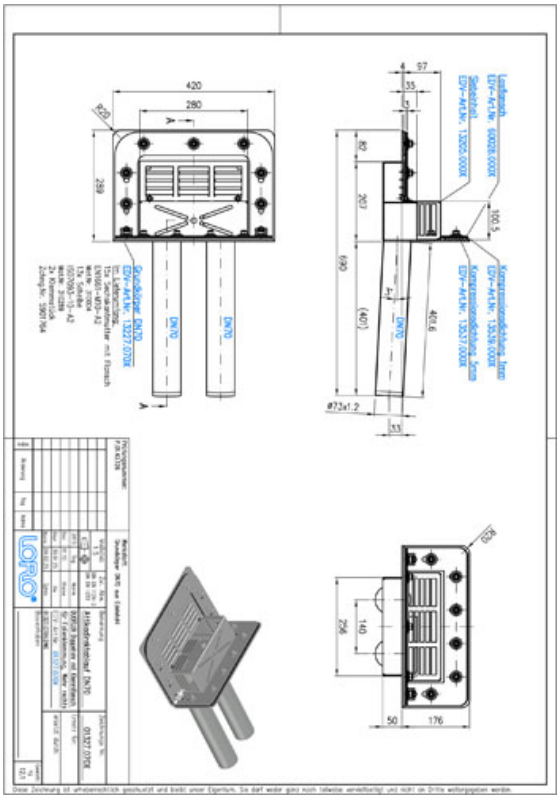

### Dati articolo

| | |
|---|---|
| Codice EAN | **4038088099759** |
| Classe ETIM | **EC010400** |
| Diametro nominale | **DN 70** |
| Misure esterne (AxLxP) | **252 x 690 x 420 mm** |
| Peso | **12,10 Kg (STK)** |
| Gruppo prodotti | **9** |
| Numero tariffa doganale | **73072980** |
| Materiale / Colore | **Edelstahl, Silber** |

### Note d'uso

Die neuen LORO-X DUOFLUX Attika-Direkt Haupt-Not-Kombi Abläufe mit Wehr links oder rechts DN70/DN70 mit Klebeflansch für den direkten Einbau in die Kante des Attikadaches kombinieren die Hauptentwässerung bestehend aus Fallleitung und Regenstandrohr mit der Notentwässerung als Speierüberlauf mit nur einem Ablauf. Sie ermöglichen dem Architekten die Gestaltung des Doppelrohres an der Fassade. Soll der Speier für die Notentwässerung in Fließrichtung z.B. links vom Sammelkasten für die Hauptentwässerung angeordnet werden, ist der Ablauf Hauptentwässerung Freispiegelströmung mit dem Wehr auf der linken Seite zu wählen. Vorteile: Nur ein Ablauf für Hauptentwässerung und Notentwässerung Hauptentwässerung mit Freispiegelströmung DN 70, Abfluss 2,2 l/s bei 35 mm Wasserhöhe Notentwässerung mit Freispiegelströmung DN 70, Abfluss 3,4 l/s bei 75 mm Wasserhöhe

### Download

Alles online

Istruzioni di installazione (PDF)
Certificato (PDF)
CAD 3D (DWG)
Disegno dimensionale (PDF)
Scheda tecnica del sistema LX 1156
BIM 3D (STEP)
Brochure (PDF)
CAD 2D (DXF)
BIM 3D (IFC)