LX ATTIKA NOT.-ABLAUF,ET:55MM,O.AUFK.

LORO-X Emergency Drain Entry depth 55 mm without upstand Weir height 55 mm Pressure support Clamping flange DN 70

Opis

LORO-X RAINSTAR siphonic parapet drain, series 89 with low penetration depth, Distant flat version without upstand, for emergency drainage with siphonic flow, discharge rate 17.7 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, roof penetration depth 55 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, made of stainless steel, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX798, drain made of stainless steel, DN 70

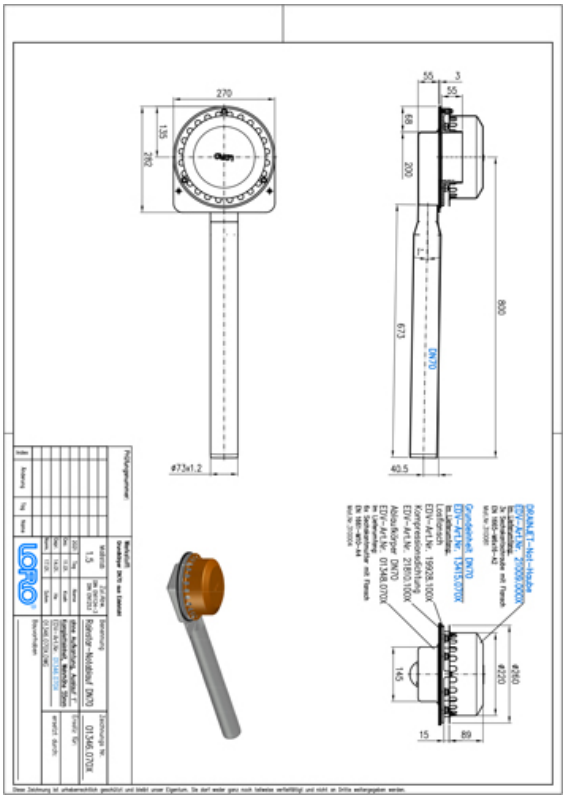

Podaci o artiklu

EAN kod	4038088105948
ETIM klasa	EC011350
Nazivni promjer	DN 70
Vanjske mjere (VxŠxD)	190 x 270 x 935 mm
Težina	5,30 Kg (STK)
Grupa proizvoda	9
Carinski tarifni broj	73072980
Materijal / Boja	Edelstahl, Silber

Napomena za upotrebu

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch.Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Dimenzijski crtež (PDF)
Prospekt (PDF)
Certifikat (PDF)
Tehnički list sustava LX 798
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)