Fiche technique du produit

LORO_Produkt-Datenblatt_01347.070X_fr.pdf
Article 01347.070X
29.11.2026, 20:40 h


LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION,WITH BONDING FLANGE FOR BITUMINOUS ROOFING

LORO-DRAINJET Attic drain with adhesive flange for bitumen 62 series DN 70

Texte de prescription

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 16.0 l/s at 55 mm water level on the roof, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX636, made of stainless steel, DN70



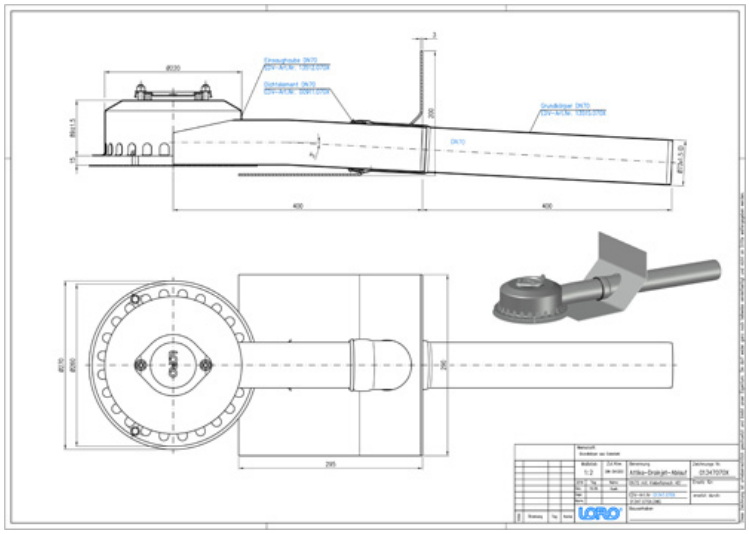

Données de l'article

Code EAN	**4038088083581**
Classe ETIM	**EC010400**
Diamètre nominal	**DN 70**
Dimensions extérieures (HxLxP)	**290 x 936 x 215 mm**
Poids	**7,00 Kg (STK)**
Groupe de produits	**9**
Numéro tarifaire douanier	**73072980**
Matériau / Couleur	**Edelstahl, Silber**

Note d'utilisation

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen.

Téléchargements

Alles online

Notice d'installation (PDF)
Certificat (PDF)
CAD 3D (DWG)
Dessin dimensionnel (PDF)
Fiche technique du système LX 636
BIM 3D (STEP)
Brochure (PDF)
CAD 2D (DXF)
BIM 3D (IFC)