

LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH BONDING FLANGE FOR

LORO-DRAINJET Attika emergency drain with adhesive flange for bitumen Height 40 mm Series 62 DN 50

Beschrijving

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 8.5 l/s at 75 mm water level on the roof and 40 mm weir height, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX1326, made of stainless steel, DN50




Artikelgegevens

EAN-code	4038088083598
ETIM Klasse	EC010400
Nominale diameter	DN 50
Buitenafmetingen (HxBxL)	290 x 897 x 215 mm
Gewicht	6,50 Kg (STK)
Productgroep	9
Douanetariefnummer	73072980

Materiaal / Kleur **Edelstahl, Silber**

Gebruiksaanwijzing

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

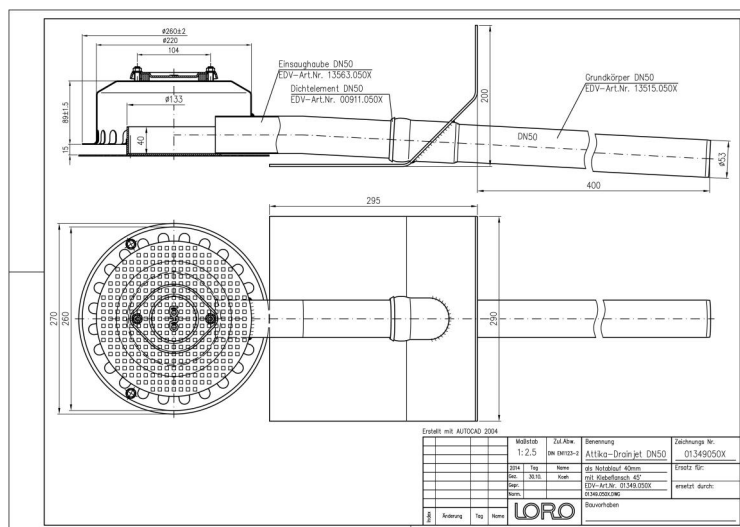

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[CAD \(DWG\)](#)

[Maattekening \(PDF\)](#)

[Systeemdatablad LX 1326](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)