

LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH BONDING FLANGE FOR

LORO-DRAINJET Attika emergency drain with adhesive flange for bitumen Height 40 mm Series 62 DN 50

Opis

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 8.5 l/s at 75 mm water level on the roof and 40 mm weir height, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX1326, made of stainless steel, DN50



Dane artykułu

Kod EAN 4038088083598

Klasa ETIM EC010400

Średnica nominalna DN 50

Wymiary zewnętrzne 290 x 897 x 215 mm (WxSxD)

Waga 6,50 Kg (STK)


Grupa produktów 9

Numer taryfy celnej 73072980

Materiał / Kolor Edelstahl, Silber

Wskazówki dotyczące użytkowania

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

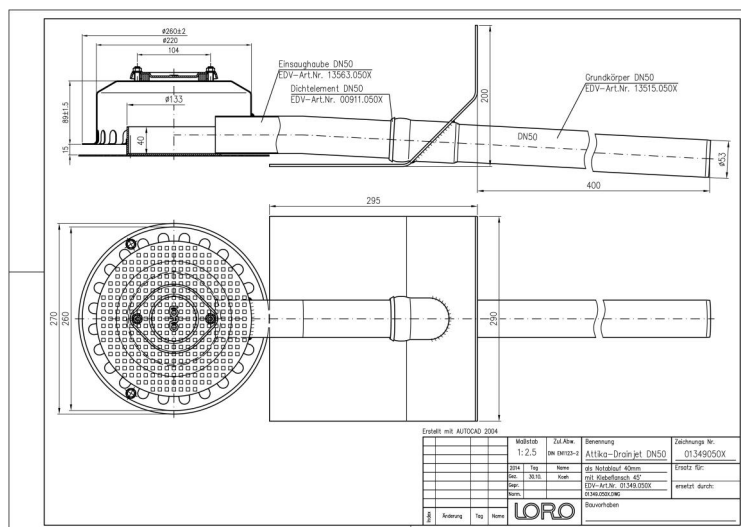

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[CAD \(DWG\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[Karta danych systemu LX 1326](#)

[Broszura \(PDF\)](#)

[CAD 2D \(DXF\)](#)