

LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH BONDING FLANGE FOR LORO-DRAINJET Attika emergency drain with adhesive flange for bitumen Height 40 mm Series 62 DN 50

Description

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 8.5 l/s at 75 mm water level on the roof and 40 mm weir height, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX1326, made of stainless steel, DN50



Données de l'article

Code EAN 4038088083598

Classe ETIM EC010400

Diamètre nominal DN 50

Dimensions extérieures (HxLxP) 290 x 897 x 215 mm

Poids 6,50 Kg (STK)


Groupe de produits 9

Numéro tarifaire douanier 73072980

Matériau / Couleur Edelstahl, Silber

Note d'utilisation

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

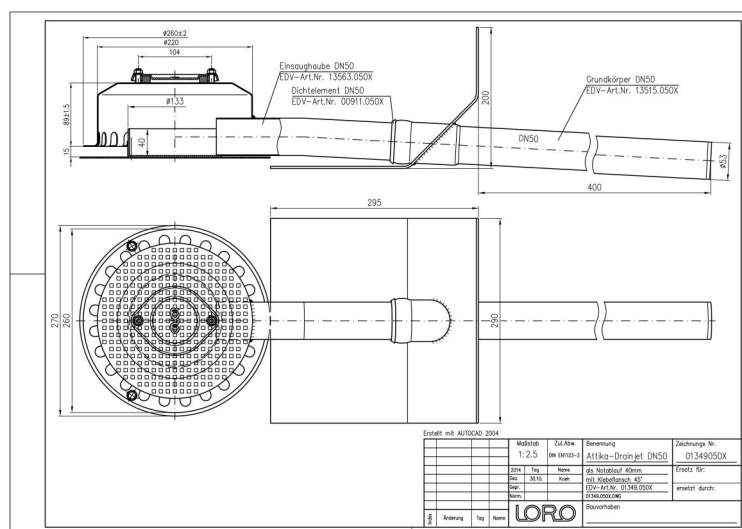

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[CAD \(DWG\)](#)

[Dessin dimensionnel \(PDF\)](#)

[Fiche technique du système LX 1326](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)