

LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH BONDING FLANGE FOR

LORO-DRAINJET Attika emergency drain with adhesive flange for bitumen Height 40 mm Series 62 DN 50

Beskrivelse

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 8.5 l/s at 75 mm water level on the roof and 40 mm weir height, with bonding flange, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX1326, made of stainless steel, DN50




Artikkeldata

EAN-kode	4038088083598
ETIM-klasse	EC010400
Nominell diameter	DN 50
Utvendige mål (HxBxL)	290 x 897 x 215 mm
Vekt	6,50 Kg (STK)
Produktgruppe	9
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach mit Klebeflansch, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

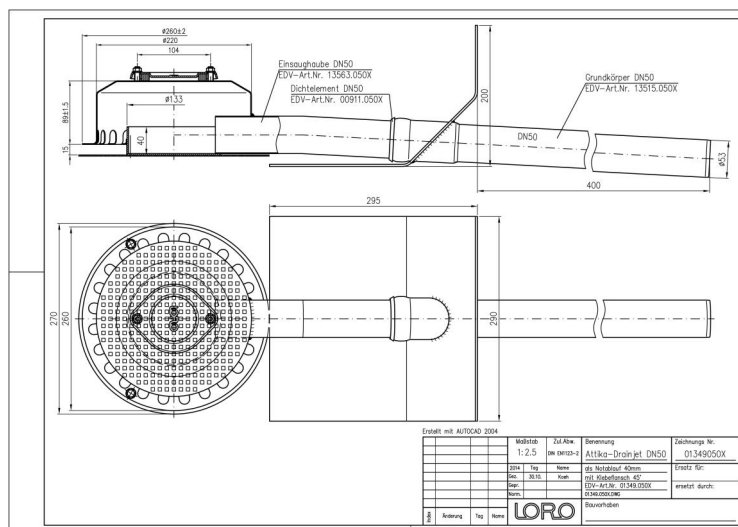

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

CAD (DWG)

[Måltegning \(PDF\)](#)

Systemdatablad LX 1326

[Brosjyre \(PDF\)](#)

CAD 2D (DXF)