


## LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR BITUMINOUS

LORO-DRAINJET parapet drain with clamping flange for bitumen made of stainless steel series 62 DN 50

### Kuvaus

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 7.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX789, made of stainless steel, DN50

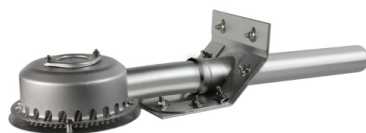


### Tuotetiedot

|                      |                    |
|----------------------|--------------------|
| EAN-koodi            | 4038088083536      |
| ETIM-luokka          | EC010400           |
| Nimellishalkaisija   | DN 50              |
| Ulkomitat (KxLxS)    | 270 x 926 x 192 mm |
| Paino                | 6,80 Kg (STK)      |
| Tuoteryhmä           | 9                  |
| Tullitariffin numero | 73072980           |
| Materiaali / Väri    | Edelstahl, Silber  |

### Käyttöohje

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

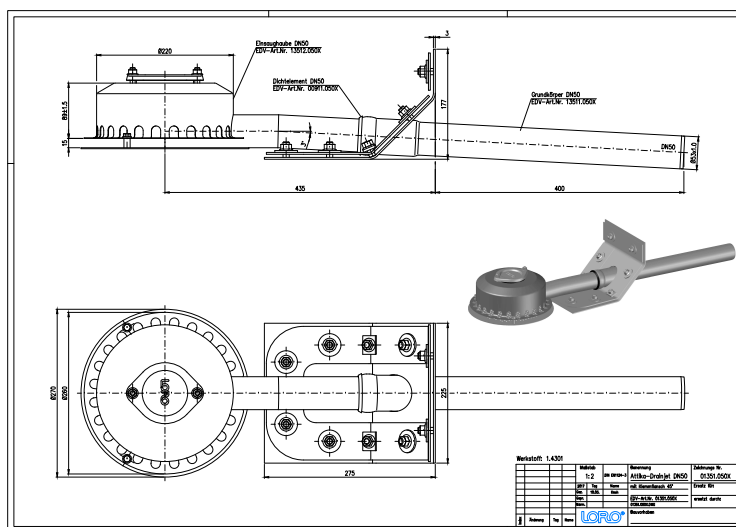

### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Mittapiirustus \(PDF\)](#)

[Järjestelmän datalehti LX 789](#)

[BIM 3D \(STEP\)](#)

[Esite \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)