

LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR BITUMINOUS

LORO-DRAINJET parapet drain with clamping flange for bitumen made of stainless steel series 62 DN 50

Opis

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 7.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX789, made of stainless steel, DN50




Dane artykułu

Kod EAN	4038088083536
Klasa ETIM	EC010400
Średnica nominalna	DN 50
Wymiary zewnętrzne (WxSxD)	270 x 926 x 192 mm
Waga	6,80 Kg (STK)
Grupa produktów	9
Numer taryfy celnej	73072980
Materiał / Kolor	Edelstahl, Silber

Wskazówki dotyczące użytkowania

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

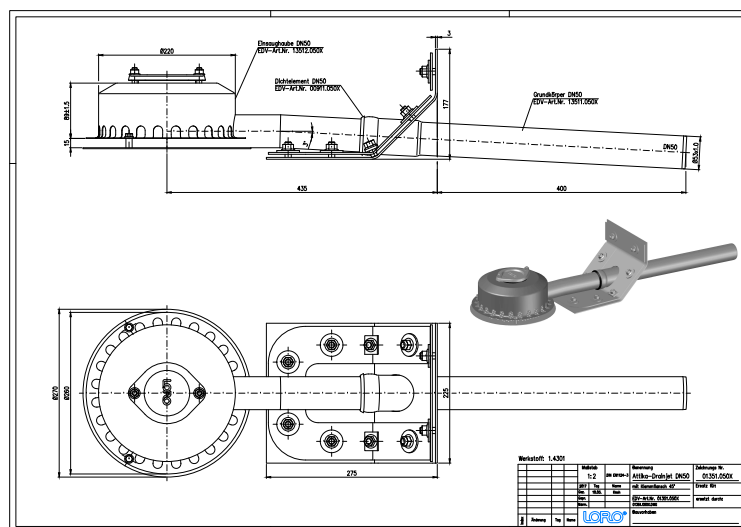

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[Karta danych systemu LX 789](#)

[BIM 3D \(STEP\)](#)

[Broszura \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)