Fiche technique du produit

LORO_Produkt-Datenblatt_01351.050X_fr.pdf
Article 01351.050X
29.11.2026, 20:40 h


LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION,WITH CLAMPING FLANGE FOR BITUMINOUS

LORO-DRAINJET parapet drain with clamping flange for bitumen made of stainless steel series 62 DN 50

Texte de prescription

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 7.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX789, made of stainless steel, DN50



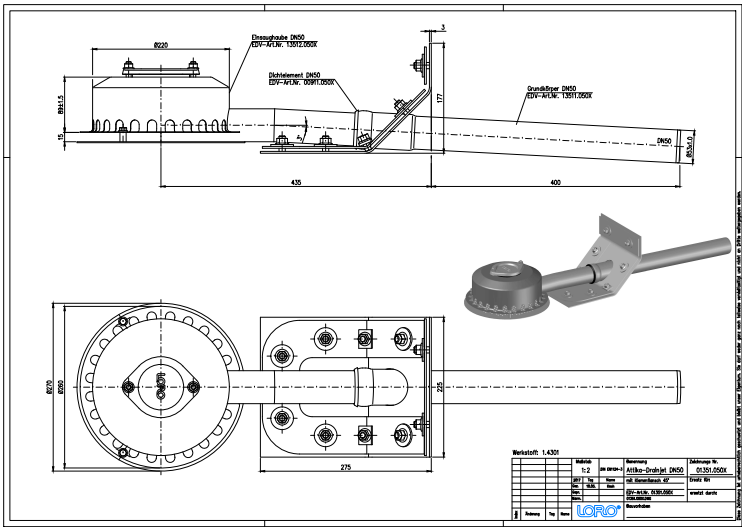

Données de l'article

Code EAN	**4038088083536**
Classe ETIM	**EC010400**
Diamètre nominal	**DN 50**
Dimensions extérieures (HxLxP)	**270 x 926 x 192 mm**
Poids	**6,80 Kg (STK)**
Groupe de produits	**9**
Numéro tarifaire douanier	**73072980**
Matériau / Couleur	**Edelstahl, Silber**

Note d'utilisation

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

Téléchargements

Alles online

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
Fiche technique du système LX 789
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)