Scheda tecnica del prodotto

LORO_Produkt-Datenblatt_01351.070X_it.pdf
Articolo 01351.070X
29.11.2026, 20:40


LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION,WITH CLAMPING FLANGE FOR BITUMINOUS

LORO-DRAINJET Attic drain with clamping flange for bitumen made of stainless steel series 62 DN 70

Voce di capitolato

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 16.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX636, made of stainless steel, DN70



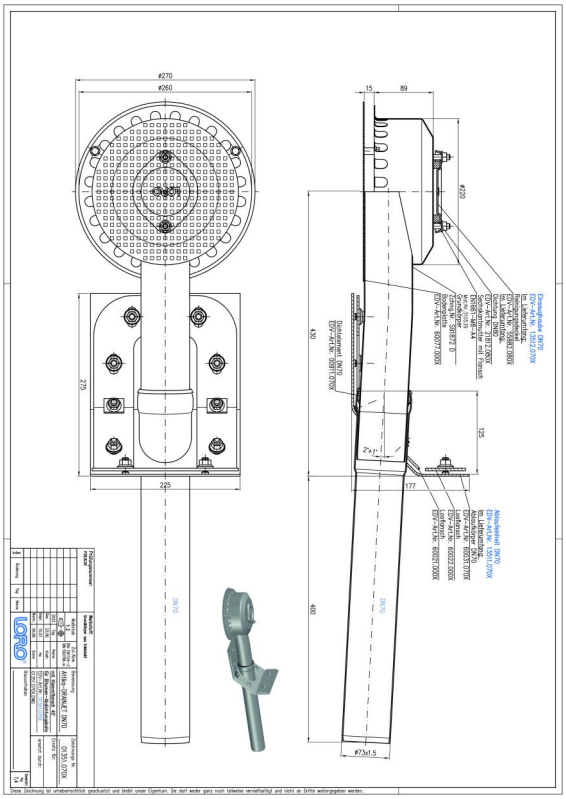

Dati articolo

Codice EAN	**4038088066096**
Classe ETIM	**EC010400**
Diametro nominale	**DN 70**
Misure esterne (AxLxP)	**270 x 927 x 192 mm**
Peso	**7,40 Kg (STK)**
Gruppo prodotti	**9**
Numero tariffa doganale	**73072980**
Materiale / Colore	**Edelstahl, Silber**

Note d'uso

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

Download

Alles online

Istruzioni di installazione (PDF)
Certificato (PDF)
CAD 3D (DWG)
Disegno dimensionale (PDF)
Scheda tecnica del sistema LX 636
BIM 3D (STEP)
Brochure (PDF)
CAD 2D (DXF)
BIM 3D (IFC)