

LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR LORO-DRAINJET ATTIKA Emergency drain with clamping flange for bitumen Weir height 40 mm Series 62 DN 50

Περιγραφή

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 8.5 l/s at 75 mm water level on the roof and 40 mm weir height, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX1326, made of stainless steel, DN50




Στοιχεία προϊόντος

Κωδικός EAN	4038088083543
Κατηγορία ETIM	EC010400
Ονομαστική διάμετρος	DN 50
Εξωτερικές διαστάσεις (ΥxΠxΜ)	270 x 926 x 192 mm
Βάρος	7,10 Kg (STK)
Ομάδα προϊόντων	9
Δασμολογικός αριθμός	73072980
Υλικό / Χρώμα	Edelstahl, Silber

Σημείωση χρήσης

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

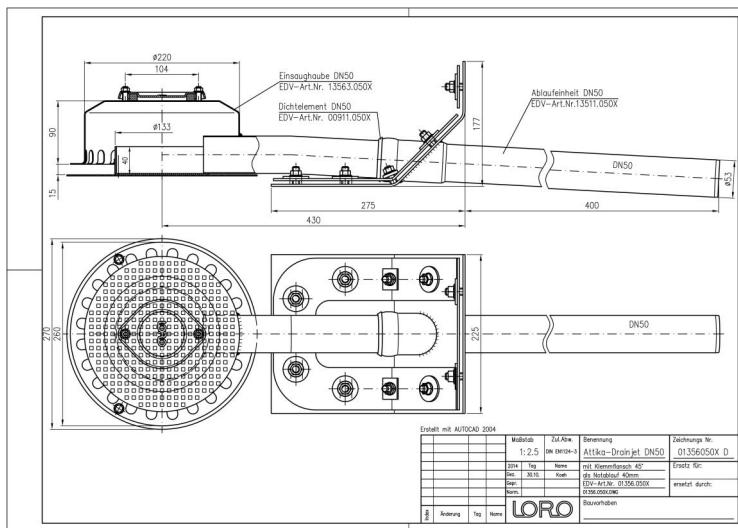

Λήψεις



Alles online

[Οδηγίες εγκατάστασης \(PDF\)](#)

[Έγκριση \(PDF\)](#)

[CAD \(DWG\)](#)

[Σχέδιο διαστάσεων \(PDF\)](#)

[Φύλλο δεδομένων συστήματος LX 1326](#)

[Φυλλάδιο \(PDF\)](#)

[CAD 2D \(DXF\)](#)