
LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR

LORO-DRAINJET ATTIKA Emergency drain with clamping flange for bitumen Weir height 40 mm Series 62 DN 50

Texte de prescription

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 8.5 l/s at 75 mm water level on the roof and 40 mm weir height, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX1326, made of stainless steel, DN50



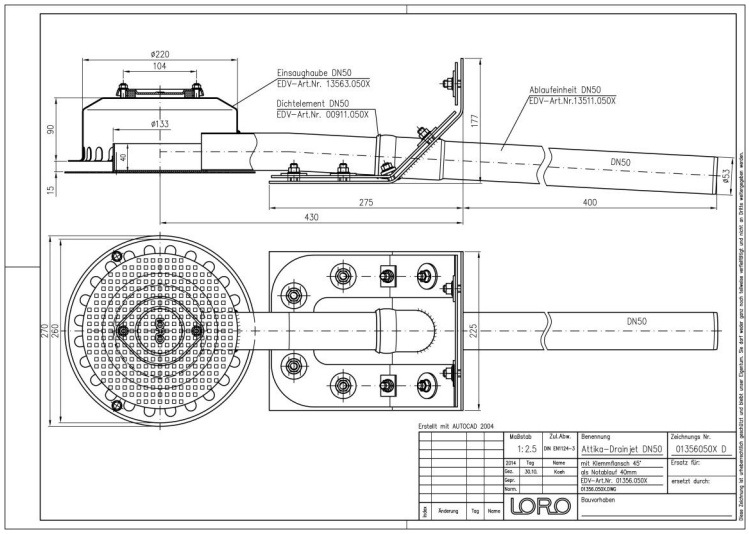

Données de l'article

Code EAN	**4038088083543**
Classe ETIM	**EC010400**
Diamètre nominal	**DN 50**
Dimensions extérieures (HxLxP)	**270 x 926 x 192 mm**
Poids	**7,10 Kg (STK)**
Groupe de produits	**9**
Numéro tarifaire douanier	**73072980**
Matériau / Couleur	**Edelstahl, Silber**

Note d'utilisation

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

Téléchargements

Alles online

Notice d'installation (PDF)
Certificat (PDF)
CAD (DWG)
Dessin dimensionnel (PDF)
Fiche technique du système LX 1326
Brochure (PDF)
CAD 2D (DXF)