

LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR LORO-DRAINJET ATTIKA Emergency drain with clamping flange for bitumen weir height 50 mm Series 62 DN 70

Descriere

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 14.5 l/s at 75 mm water level on the roof and 50 mm weir height, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX637, made of stainless steel, DN70




Date articol

Cod EAN	4038088066164
Clasă ETIM	EC010400
Diametru nominal	DN 70
Dimensiuni exterioare (ÎxLxA)	270 x 927 x 192 mm
Greutate	7,20 Kg (STK)
Grupă de produse	9
Număr tarif vamal	73072980
Material / Culoare	Edelstahl, Silber

Notă de utilizare

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

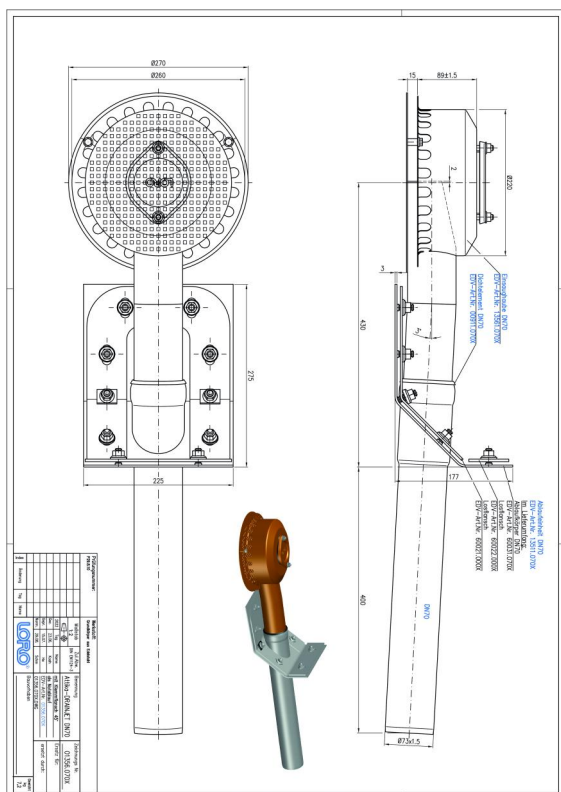

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Desen CAD \(PDF\)](#)

[Fișă tehnică de sistem LX 637](#)

[BIM 3D \(STEP\)](#)

[Broșură \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)