
LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR

LORO-DRAINJET ATTIKA Emergency drain with clamping flange for bitumen weir height 50 mm Series 62 DN 70

Text pentru caietul de sarcini

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 14.5 l/s at 75 mm water level on the roof and 50 mm weir height, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX637, made of stainless steel, DN70



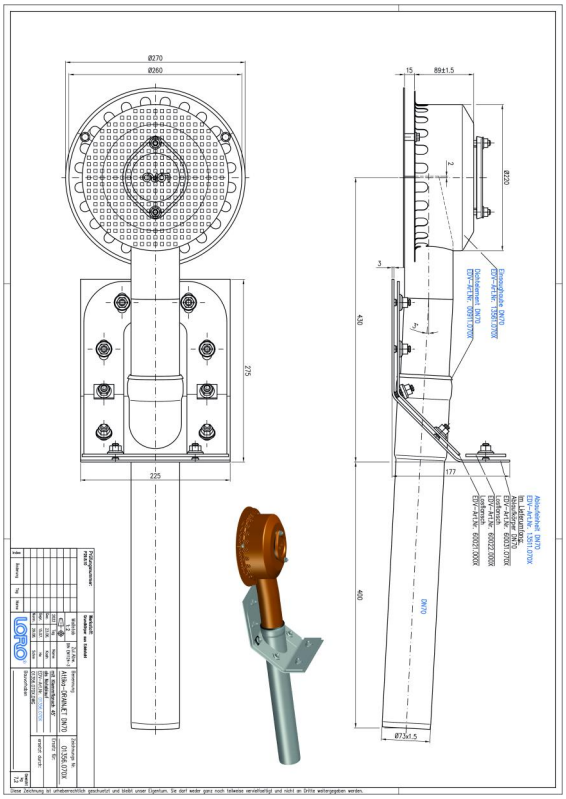

Date articol

Cod EAN	**4038088066164**
Clasă ETIM	**EC010400**
Diametru nominal	**DN 70**
Dimensiuni exterioare (ÎxLxA)	**270 x 927 x 192 mm**
Greutate	**7,20 Kg (STK)**
Grupă de produse	**9**
Număr tarif vamal	**73072980**
Material / Culoare	**Edelstahl, Silber**

Notă de utilizare

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

Descărcări

Alles online

Instrucțiuni de montaj (PDF)
Certificat (PDF)
CAD 3D (DWG)
Desen CAD (PDF)
Fișă tehnică de sistem LX 637
BIM 3D (STEP)
Broșură (PDF)
CAD 2D (DXF)
BIM 3D (IFC)