# LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR

**LORO-DRAINJET ATTIKA Emergency drain with clamping flange for bitumen weir height 50 mm Series 62 DN 70**

## Text pre výberové konanie

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 14.5 l/s at 75 mm water level on the roof and 50 mm weir height, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX637, made of stainless steel, DN70



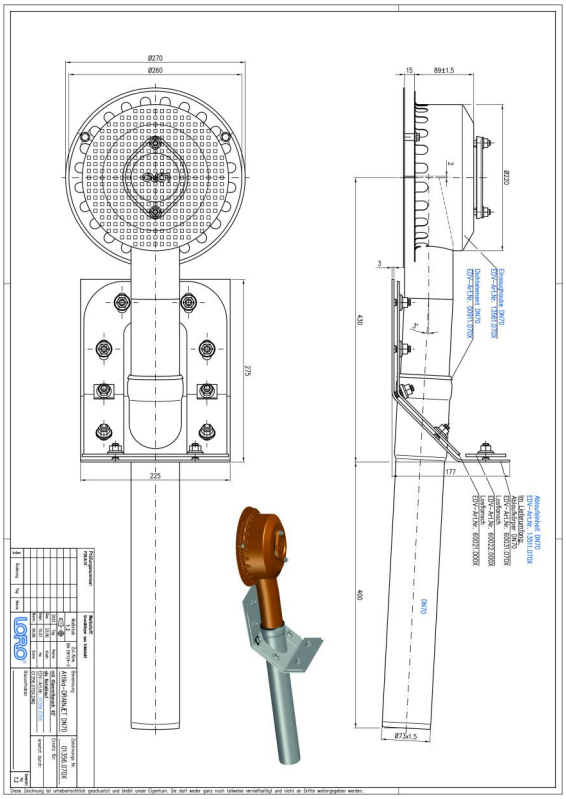

## Údaje o artikli

| | |
|---|---|
| EAN kód | 4038088066164 |
| ETIM trieda | EC010400 |
| Menovitý priemer | DN 70 |
| Vonkajšie rozmery (VxŠxH) | 270 x 927 x 192 mm |
| Hmotnosť | 7,20 Kg (STK) |
| Skupina produktov | 9 |
| Colný sadzobník | 73072980 |
| Materiál / Farba | Edelstahl, Silber |

## Pokyny na použitie

LORO-DRAINJET® Attika-Notabläufe ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

## Na stiahnutie

Alles online

Návod na montáž (PDF)
Certifikát (PDF)
CAD 3D (DWG)
Rozmerový výkres (PDF)
Systémový dátový list LX 637
BIM 3D (STEP)
Prospekt (PDF)
CAD 2D (DXF)
BIM 3D (IFC)