
LORO-X DRAINJET SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT ROOF PENETRATION, WITH CLAMPING FLANGE FOR

LORO-DRAINJET ATTIKA Emergency drain with clamping flange for bitumen weir height 50 mm Series 62 DN 70

Texto para caderno de encargos

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for emergency drainage with siphonic flow, discharge rate 14.5 l/s at 75 mm water level on the roof and 50 mm weir height, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX637, made of stainless steel, DN70



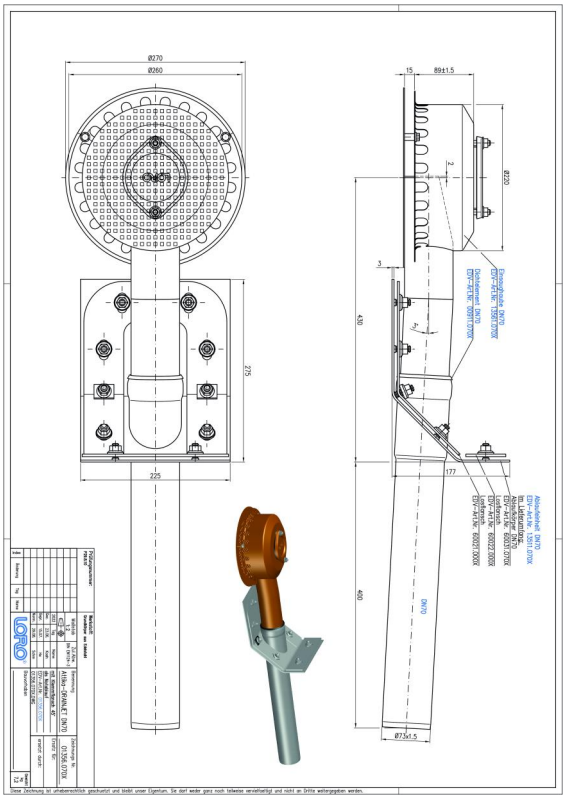

Dados do artigo

Código EAN	**4038088066164**
Classe ETIM	**EC010400**
Diâmetro nominal	**DN 70**
Medidas exteriores (AxLxP)	**270 x 927 x 192 mm**
Peso	**7,20 Kg (STK)**
Grupo de produtos	**9**
Número de pauta aduaneira	**73072980**
Material / Cor	**Edelstahl, Silber**

Nota de utilização

LORO-DRAINJET® Attika-Notabläufe-ohne Eingriff ins Dach, DN 50 und DN 70, für Bitumen-Dachabdichtungsbahnen

Transferências

Alles online

Instruções de instalação (PDF)
Homologação (PDF)
CAD 3D (DWG)
Desenho cotado (PDF)
Ficha técnica do sistema LX 637
BIM 3D (STEP)
Brochura (PDF)
CAD 2D (DXF)
BIM 3D (IFC)