LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN WITH CLAMPING FLANGE, WITH CUT-OUT DEPTH OF 55 MM FOR BITUMINOUS

LORO-RAINSTAR Attika emergency drain stainless steel 55 mm installation depth clamping flange for bitumen gravity flow DN100

Beskrivelse

LORO-X RAINSTAR parapet drain, series 89 with low penetration depth, for emergency drainage with gravity flow, made of stainless steel, DN100, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 55 mm, with DRAINLET hood made of stainless steel, according to DIN EN 1253, discharge rate 8.0 l/sec at 75 mm water level on the roof with 4.2 m non-ventilated downpipe according to system data sheet LX668, discharge rate 4.6 l/sec at 75 mm water level on the roof as spout according to system data sheet LX667

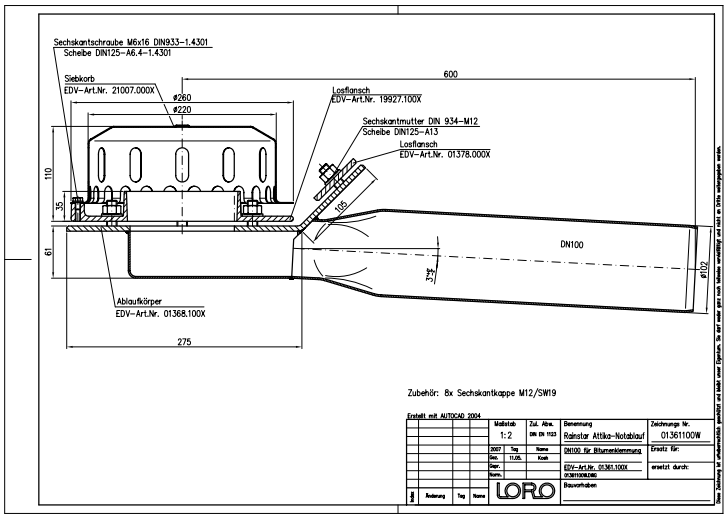

Artikeldata

EAN-kode	4038088074718
ETIM Klasse	EC010400
Nominel diameter	DN 100
Ydermål (HxBxL)	270 x 738 x 215 mm
Vægt	5,80 Kg (STK)
Produktgruppe	9
Toldtarifnummer	73072980
Materiale / Farve	Edelstahl, Silber

Brugsanvisning

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch.Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

Downloads

Alles online

- Installationsvejledning (PDF)
- Certifikat (PDF)
- CAD 2D (DXF)
- Måltegning (PDF)
- Systemdatablad LX 667
- CAD (DWG)
- Brochure (PDF)
- Systemdatablad LX 668
- BIM Revit (RFA)