LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, WITH CLAMPING FLANGE, WITH CUT-OUT DEPTH OF 50 MM FOR BITUMINOUS

LORO-RAINSTAR Attika emergency drain stainless steel 55mm installation depth clamping flange for bitumen pressure pipe DN70

Descripción

LORO-X RAINSTAR siphonic parapet drain, series 89 with low penetration depth, for emergency drainage with siphonic flow, discharge rate 17.6 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 55 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX798, made of stainless steel, DN70

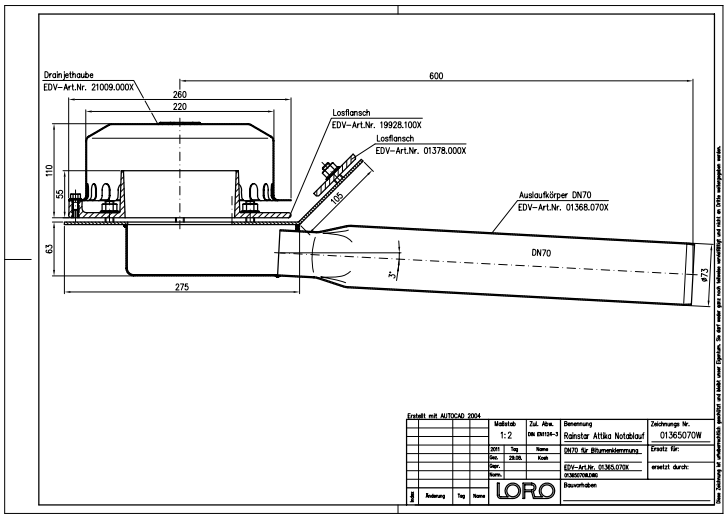

Datos del artículo

Código EAN	4038088074787
Clase ETIM	EC010400
Diámetro nominal	DN 70
Medidas exteriores (AxAxL)	270 x 737 x 214 mm
Peso	5,70 Kg (STK)
Grupo de productos	9
Número de arancel aduanero	73072980
Material / Color	Edelstahl, Silber

Nota de uso

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch.Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

Descargas

Alles online

Instrucciones de instalación (PDF)
Dibujo dimensional (PDF)
Folleto (PDF)
Certificado (PDF)
Ficha técnica del sistema LX 798
CAD 2D (DXF)
CAD (DWG)
BIM Revit (RFA)