LORO-X RAINSTAR SCUPPER DRAIN, SIPHONIC FLOW, WITH CLAMPING FLANGE, WITH CUT-OUT DEPTH OF 50 MM FOR PLASTIC ROOFING SHEETS

LORO-RAINSTAR Attica drain stainless steel 55 mm installation depth Clamping flange for plastic pressure pipe DN 70

Opis

LORO-X RAINSTAR siphonic parapet drain, series 89 with low penetration depth, for main drainage with siphonic flow, discharge rate 15.6 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 90-degree upstand for plastic roofing sheets, roof penetration depth 55 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX473, made of stainless steel, DN70

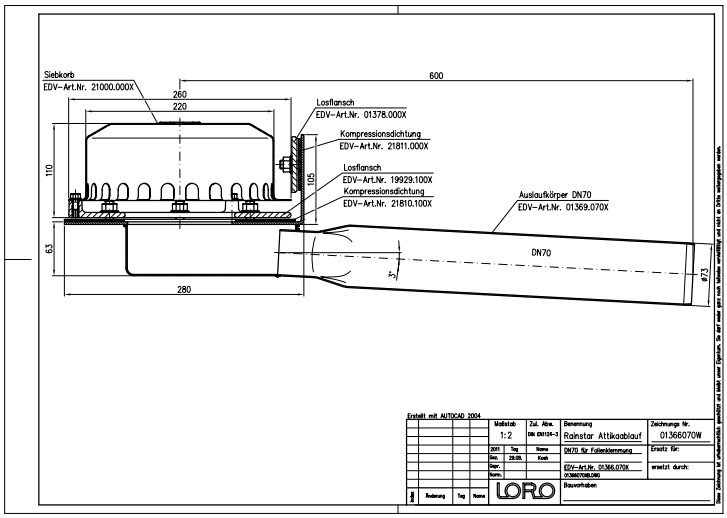

Podaci o artiklu

EAN kod	4038088074763
ETIM klasa	EC011350
Nazivni promjer	DN 70
Vanjske mjere (VxŠxD)	270 x 737 x 214 mm
Težina	5,70 Kg (STK)
Grupa proizvoda	9
Carinski tarifni broj	73072980
Materijal / Boja	Edelstahl, Silber

Napomena za upotrebu

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch.Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

Preuzimanja

Alles online

- Upute za ugradnju (PDF)
- Certifikat (PDF)
- CAD 3D (DWG)
- BIM Revit (RFA)
- Dimenzijski crtež (PDF)
- Tehnički list sustava LX 473
- BIM 3D (STEP)
- Prospekt (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)