LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, WITH CLAMPING FLANGE, WITH CUT-OUT DEPTH OF 50 MM FOR PLASTIC ROOFING

LORO-RAINSTAR Attika emergency drain stainless steel 55 mm installation depth clamping flange for plastic pressure pipe DN100

Beschrijving

LORO-X RAINSTAR siphonic parapet drain, series 89 with low penetration depth, for emergency drainage with siphonic flow, discharge rate 23.0 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 90-degree upstand for plastic roofing sheets, roof penetration depth 55 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX666, made of stainless steel, DN100

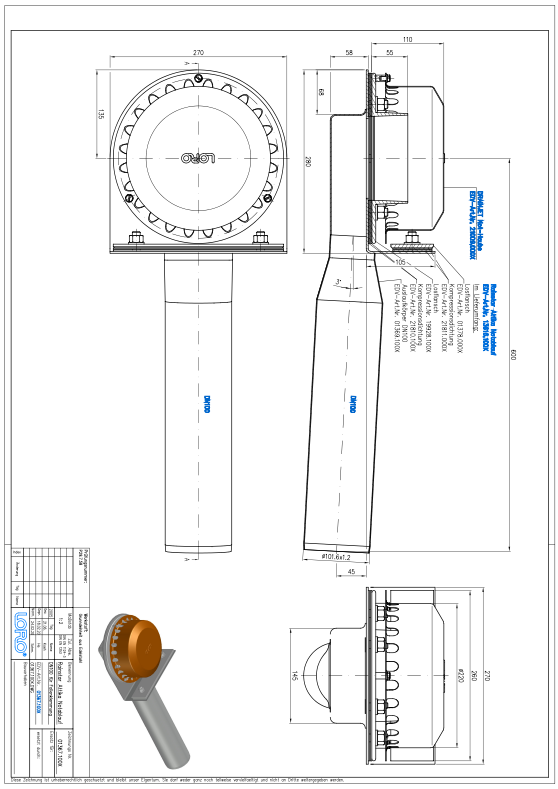

Artikelgegevens

EAN-code	4038088074817
ETIM Klasse	EC010400
Nominale diameter	DN 100
Buitenafmetingen (HxBxL)	270 x 738 x 215 mm
Gewicht	6,20 Kg (STK)
Productgroep	9
Douanetariefnummer	73072980
Materiaal / Kleur	Edelstahl, Silber

Gebruiksaanwijzing

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch.Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

Downloads

Alles online

- Installatiehandleiding (PDF)
- Certificaat (PDF)
- CAD 3D (DWG)
- BIM Revit (RFA)
- Maattekening (PDF)
- Systeemdatablad LX 666
- BIM 3D (STEP)
- Brochure (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)