Produktdatablad

LORO_Produkt-Datenblatt_01393.040X_no.pdf
Artikkel 01393.040X
27.11.2026, 08:52

LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 88 DISTANT, WITHOUT RAISED EDGE, WITH CLAMPING FLANGE, FOR

LORO-RAINSTAR stainless steel parapet drain without backsplash with clamping flange pressure flow DN 40

Beskrivelsestekst

LORO-X RAINSTAR siphonic parapet drain, series 88 without upstand, for emergency drainage with siphonic flow, discharge rate 4.5 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, roof penetration depth 76 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX682, made of stainless steel, DN40



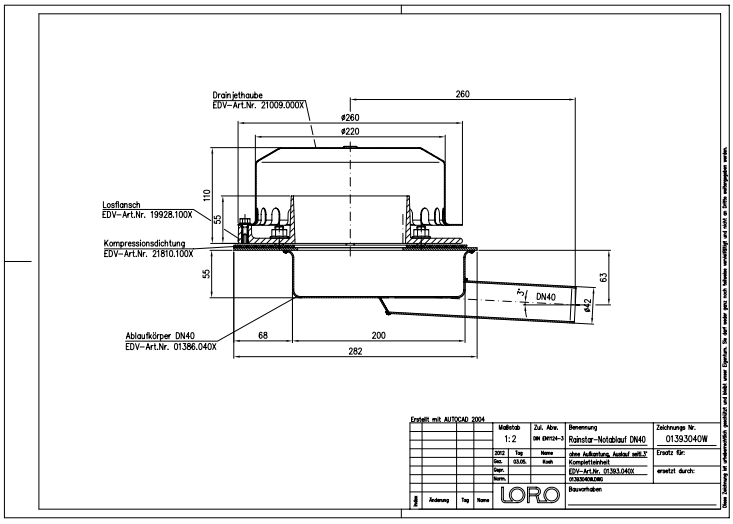

Artikkeldata

EAN-kode	**4038088075753**
ETIM-klasse	**EC010400**
Nominell diameter	**DN 40**
Utvendige mål (HxBxL)	**270 x 397 x 205 mm**
Vekt	**3,90 Kg (STK)**
Produktgruppe	**9**
Tolltariffnummer	**73072980**
Materiale / Farge	**Edelstahl, Silber**

Bruksanvisning

LORO-X RAINSTAR-Distant Attikaentwässerung ohne Aufkantung ermöglicht den Einbau des Ablaufes in variablem Abstand zur Attika. So ist es möglich die Dachschräge zur Attika wieder ansteigen zu lassen und den tiefsten Punkt weiter zur Dachmitte zu verlagern. Die Verlegung des waagerechten Rohres kann z.B. innerhalb der Wärmedämmung erfolgen.Die Abdichtung erfolgt nur in einer Ebene mit LORO-Klemmflansch. Die Silent-Power Druckströmung in Kombination mit der patentierten 2-stufigen Beschleunigung des Wassers im Ablauf sorgt für starke Abflussleistung von bis zu 21 l/s.Zu beachten ist jedoch, dass ein zu großer Abstand zur Attika die Abflussleistung beeinträchtigen kann.Vorteile: - Variable Entfernung zur Attika -bis 26,0 l/s als Notentwässerung bei 75mm -hohe Abflussleistung durch patentiertes, tiefergelegtes Rohr -nur eine horizontale Abdichtungsebene -patentiertes Notentwässerungswehr unter der Haube

Nedlastinger

Alles online

Monteringsanvisning (PDF)
Godkjenning (PDF)
CAD (DWG)
Måltegning (PDF)
Systemdatablad LX 682
BIM Revit (RFA)
Brosjyre (PDF)
CAD 2D (DXF)