## LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, SERIES 88 DISTANT, WITHOUT RAISED EDGE, WITH CLAMPING FLANGE, FOR

**LORO-RAINSTAR stainless steel parapet emergency drain without upstand with clamping flange pressure outlet DN 100**

### Descrizione

LORO-X RAINSTAR siphonic parapet drain, series 88 without upstand, for emergency drainage with siphonic flow, discharge rate 26.0 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, roof penetration depth 106 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX482, made of stainless steel, DN100

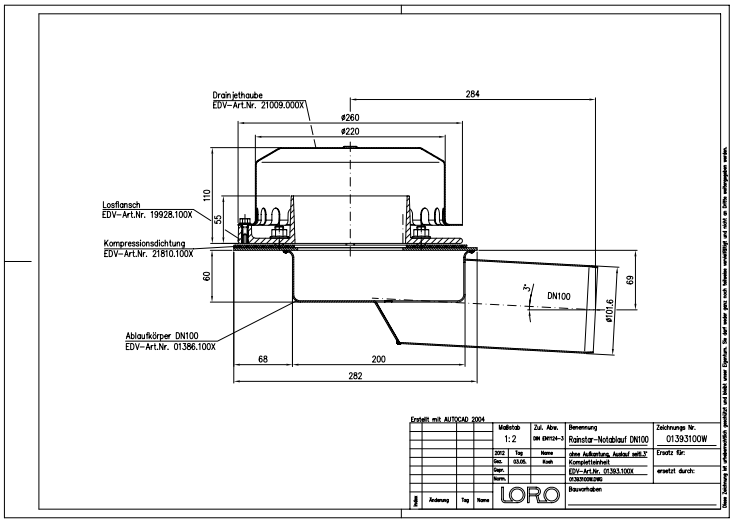


### Dati articolo

| | |
|---|---|
| Codice EAN | **4038088074169** |
| Classe ETIM | **EC010400** |
| Diametro nominale | **DN 100** |
| Misure esterne (AxLxP) | **270 x 422 x 240 mm** |
| Peso | **4,30 Kg (STK)** |
| Gruppo prodotti | **9** |
| Numero tariffa doganale | **73072980** |
| Materiale / Colore | **Edelstahl, Silber** |

### Note d'uso

LORO-X RAINSTAR-Distant Attikaentwässerung ohne Aufkantung ermöglicht den Einbau des Ablaufes in variablem Abstand zur Attika. So ist es möglich die Dachschräge zur Attika wieder ansteigen zu lassen und den tiefsten Punkt weiter zur Dachmitte zu verlagern. Die Verlegung des waagerechten Rohres kann z.B. innerhalb der Wärmedämmung erfolgen.Die Abdichtung erfolgt nur in einer Ebene mit LORO-Klemmflansch. Die Silent-Power Druckströmung in Kombination mit der patentierten 2-stufigen Beschleunigung des Wassers im Ablauf sorgt für starke Abflussleistung von bis zu 21 l/s.Zu beachten ist jedoch, dass ein zu großer Abstand zur Attika die Abflussleistung beeinträchtigen kann.Vorteile: -Variable Entfernung zur Attika -bis 21,7 l/s bei Notentwässerung mit Druckströmung bei 75mm -hohe Abflussleistung durch patentiertes, tiefergelegtes Rohr -nur eine horizontale Abdichtungsebene -patentiertes Notentwässerungswehr unter der Haube

### Download

Alles online

- Istruzioni di installazione (PDF)
- Certificato (PDF)
- CAD 3D (DWG)
- BIM Revit (RFA)
- Disegno dimensionale (PDF)
- Scheda tecnica del sistema LX 482
- BIM 3D (STEP)
- Brochure (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)