

## LORO-X PIPE WITH 1 SOCKET 250 MM DN 100

### LORO-X pipe 1 socket 250 mm DN 100

#### Beskrivning

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 250 mm + 1socket, DN100




#### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088007068               |
| ETIM-klass          | EC011386                    |
| Nominell diameter   | DN 100                      |
| Nominell längd/grad | 250                         |
| Yttermått (HxBxL)   | 118 x 118 x 320 mm          |
| Vikt                | 1,70 Kg (STK)               |
| Produktgrupp        | 1                           |
| Tullnummer          | 73063012                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

#### Användningsanvisning

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

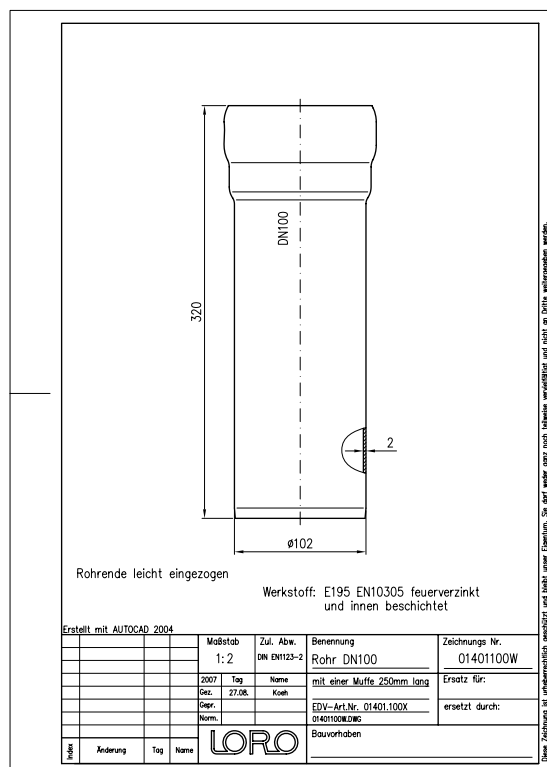

#### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkännande \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Måttitning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Broschyr \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)