

## LORO-X PIPE WITH 1 SOCKET 250 MM DN 125

### LORO-X pipe 1 socket 250 mm DN 125

#### Popis

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 250 mm + 1socket, DN125




#### Údaje o artikli

|                           |                             |
|---------------------------|-----------------------------|
| EAN kód                   | 4038088007075               |
| ETIM trieda               | EC011386                    |
| Menovitý priemer          | DN 125                      |
| Menovitá dĺžka/stupeň     | 250                         |
| Vonkajšie rozmery (VxŠxH) | 152 x 152 x 325 mm          |
| Hmotnosť                  | 2,70 Kg (STK)               |
| Skupina produktov         | 1                           |
| Colný sadzovník           | 73063018                    |
| Materiál / Farba          | Stahl feuerverzinkt, Silber |

#### Pokyny na použitie

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

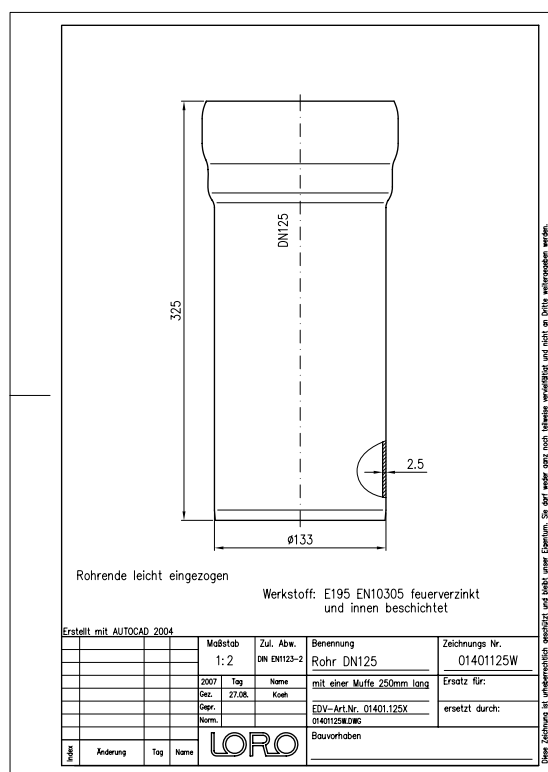

#### Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)  
[Certifikát \(PDF\)](#)  
[BIM IFC4 \(parametrisch\)](#)

[Rozmerový výkres \(PDF\)](#)  
[CAD 2D \(DXF\)](#)  
[BIM Revit \(RFA\)](#)

[Prospekt \(PDF\)](#)  
[CAD \(DWG\)](#)