LX ATTIKAABLAUF NOT,SEITL.F.M.HÖHENVAR.

LORO-X Attica drain Emergency drainage lateral for with height variable weir according to specification DN 100 Specify weir height

Beskrivelse

LORO-X series 88 Attika-Distant, emergency drain, Building-related design, please indicate desired weir height when ordering, for emergency drainage with gravity flow, variable weir height, with clamping flange, as loose and fixed flange construction, without upstand for bitumen and plastic roofing sheets, roof penetration depth 106 mm, proof of performance according to specification sheet LX1840 DN100



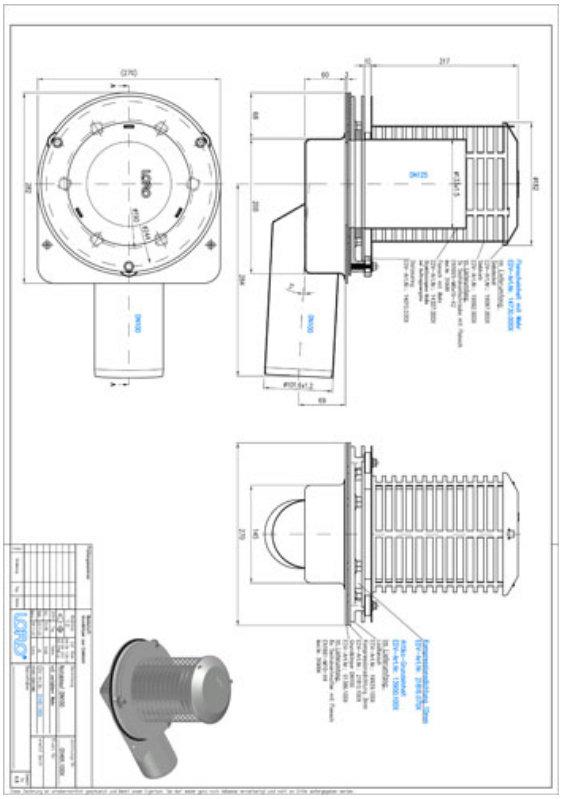

Artikeldata

EAN-kode	4038088100264
ETIM Klasse	EC010400
Nominel diameter	DN 100
Ydermål (HxBxL)	280 x 270 x 422 mm
Vægt	6,80 Kg (STK)
Produktgruppe	9
Toldtarifnummer	73072980
Materiale / Farve	Edelstahl, Silber

Brugsanvisning

LORO bietet für Hauptentwässerung mit Retention und Notentwässerung mit höhenvariablem Wehr aufeinander abgestimmte VARIOFIT Strömungshilfen, die objektbezogen berechnet und gefertigt werden. Die Höhe des Anstauelementes der Notentwässerung wird objektbezogen an die Retentionswasserhöhe der Hauptentwässerung mit Retention angepasst. Die aufgeführten Strömungshilfen passen auf die Grundkörper der angegebenen Serien der Flachdachentwässerung.

Downloads

Alles online

Installationsvejledning (PDF)
Systemdatablad LX 1840
BIM 3D (STEP)
Måltegning (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Brochure (PDF)
CAD 3D (DWG)