

LORO-X RED.-ABZWEIG M.STECK-VERB.

LORO-X reduced branch with red plug connection DN 70/50

Description

LORO-X reducing push-fit reducing branch, made of steel, hot-dip galvanized, with socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 87 degrees, DN70/50




Article information

EAN Code	4038088061749
ETIM Class	EC003025
Nominal diameter	DN 70, DN 50
Nominal length/degree	87
Outside measurements (HxWxL)	73 x 103 x 320 mm
Weight	1,10 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

LORO-X Red.-Steck Red.-Abzweige ermöglichen das wasserdichte, seitliche Einleiten eines LORO-X Stahlabflussrohres (Muffe) mit einer kleineren Nennweite in eine Red.-Steck Fallleitung (reduziertes Einschubende) mit einer größeren Nennweite.

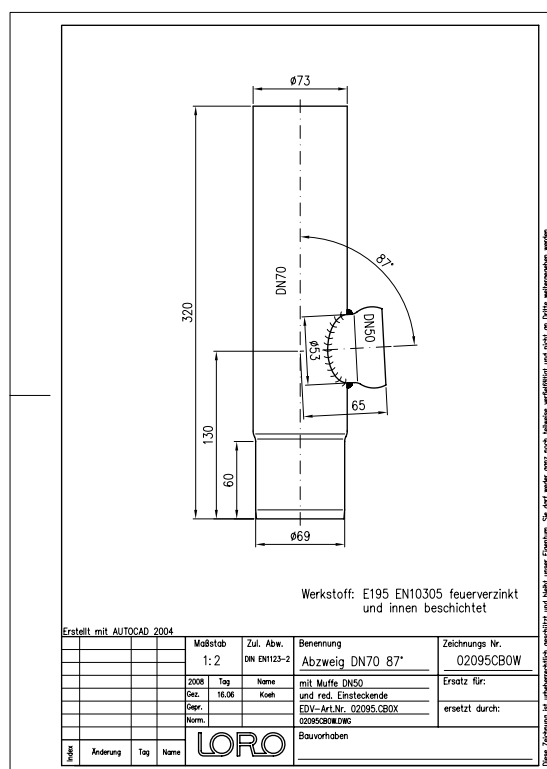

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

[CAD drawing \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)