LORO-X RED.-ABZWEIG M.STECK-VERB.

LORO-X reduced branch with red plug connection DN 100/50

Beskrivelse

LORO-X reducing push-fit reducing branch, made of steel, hot-dip galvanized, with socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 87 degrees, DN100/50

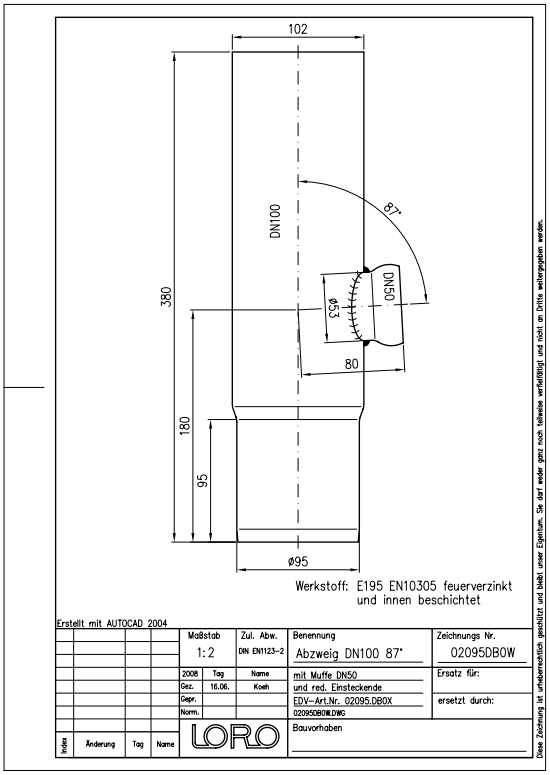

Artikeldata

EAN-kode	**4038088061756**
ETIM Klasse	**EC003025**
Nominel diameter	**DN 50, DN 100**
Nominel længde/grad	**87**
Ydermål (HxBxL)	**102 x 133 x 380 mm**
Vægt	**2,10 Kg (STK)**
Produktgruppe	**1**
Toldtarifnummer	**73089098**
Materiale / Farve	**Stahl feuerverzinkt, Silber**

Brugsanvisning

LORO-X Red.-Steck Red.-Abzweige ermöglichen das wasserdichte, seitliche Einleiten eines LORO-X Stahlabflussrohres (Muffe) mit einer kleineren Nennweite in eine Red.-Steck Fallleitung (reduziertes Einschubende) mit einer größeren Nennweite.

Downloads

Installationsvejledning (PDF)
Certifikat (PDF)
Måltegning (PDF)
BIM IFC4 (parametrisch)
Brochure (PDF)

Alles online