LORO-X BRANCH WITHOUT SOCKET 45 DEGREE DN 300/250

LORO-X branch 45 degrees socketless DN 300/250

Beschrijving

LORO-XML branch, made of steel, hot-dip galvanized, without socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 45 degrees, DN300/250

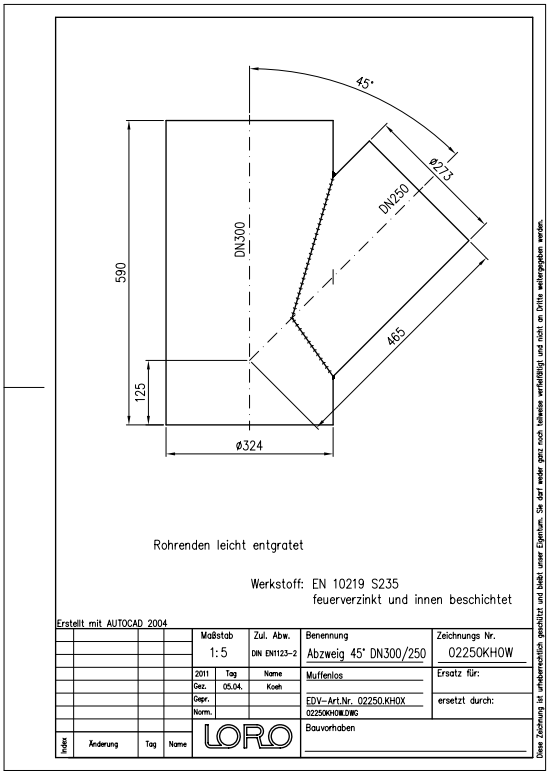

Artikelgegevens

EAN-code	**4038088068083**
ETIM Klasse	**EC003025**
Nominale diameter	**DN 300, DN 250**
Nominale lengte/graad	**45**
Buitenafmetingen (HxBxL)	**324 x 587 x 590 mm**
Gewicht	**16,00 Kg (STK)**
Productgroep	**1**
Douanetariefnummer	**73089098**
Materiaal / Kleur	**Stahl feuerverzinkt, Silber**

Gebruiksaanwijzing

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Downloads

Alles online

- Installatiehandleiding (PDF)
- Certificaat (PDF)
- BIM IFC4 (parametrisch)
- Maattekening (PDF)
- CAD 2D (DXF)
- Brochure (PDF)
- CAD (DWG)