## LORO-X REDUCED BRANCH, I=WITHOUT SOCKET, II=SOCKET 45 DEGREE DN 250/150

**LORO-X reduced branch socketless /socket DN 250/150**

### Beskrivning

LORO-XML branch, made of steel, hot-dip galvanized, without socket/socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 45 degrees, DN250/150

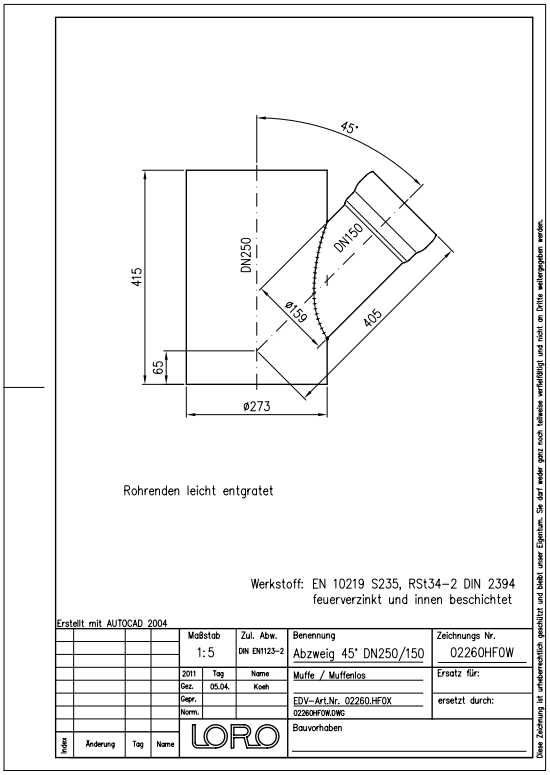


### Artikeldata

| | |
|---|---|
| EAN-kod | **4038088068113** |
| ETIM-klass | **EC003025** |
| Nominell diameter | **DN 250, DN 150** |
| Nominell längd/grad | **45** |
| Yttermått (HxBxL) | **273 x 484 x 415 mm** |
| Vikt | **14,10 Kg (STK)** |
| Produktgrupp | **1** |
| Tullnummer | **73089098** |
| Material / Färg | **Stahl feuerverzinkt, Silber** |

### Användningsanvisning

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

### Nedladdningar

Alles online

- Monteringsanvisning (PDF)
- Godkännande (PDF)
- BIM 3D (STEP)
- Måttritning (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Broschyr (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)