LORO-X REDUCED BRANCH, I=WITHOUT SOCKET, II=SOCKET 0 DEGREE DN 300/150

LORO-X reduced branch socketless /socket DN 300/150

Description

LORO-XML branch, made of steel, hot-dip galvanized, without socket/socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 45 degrees, DN300/150

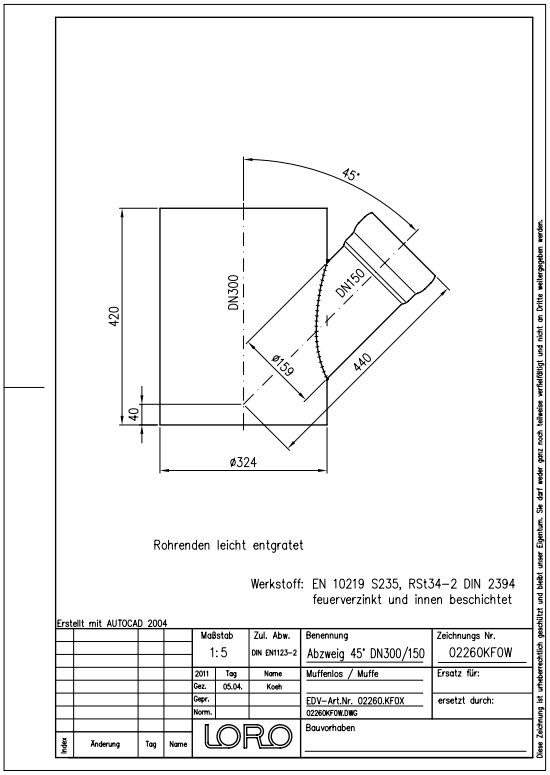

Article information

EAN Code	**4038088068151**
ETIM Class	**EC003025**
Nominal diameter	**DN 300, DN 150**
Outside measurements (HxWxL)	**324 x 534 x 420 mm**
Weight	**15,80 Kg (STK)**
Product group	**1**
Customs tariff number	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Usage note

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Downloads

Alles online

- Installation (PDF)
- Certificate (PDF)
- BIM 3D (STEP)
- CAD drawing (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Brochure (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)