LORO-X BEND WITHOUT SOCKET 70 DEGREE DN 300

LORO-X bend 70 degrees socketless DN 300

Popis

LORO-XML bend, made of steel, hot-dip galvanized, without socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 70 degrees, DN300

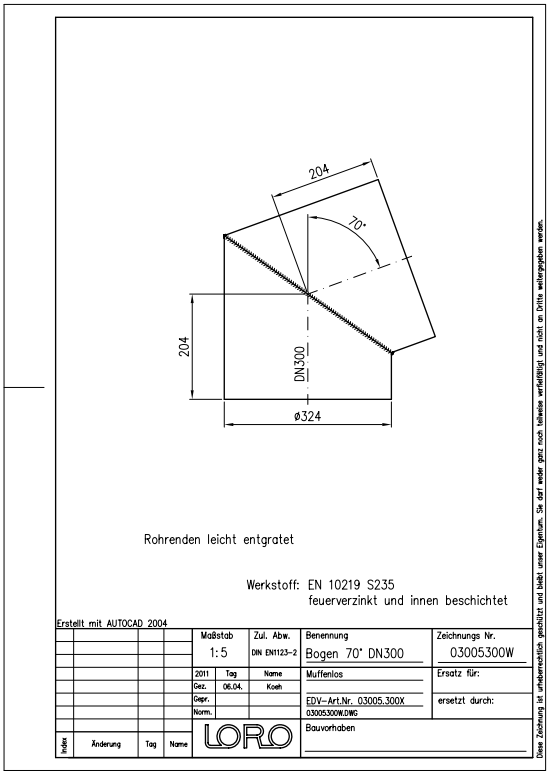

Údaje o artiklu

EAN kód	4038088068182
ETIM třída	EC003024
Jmenovitý průměr	DN 300
Jmenovitá délka/stupeň	70
Vnější rozměry (VxŠxD)	324 x 409 x 426 mm
Hmotnost	14,20 Kg (STK)
Skupina produktů	1
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Ke stažení

Alles online

Návod k instalaci (PDF)
Certifikát (PDF)
BIM IFC4 (parametrisch)
Výkres rozměrů (PDF)
CAD 2D (DXF)
Prospekt (PDF)
CAD (DWG)