LORO-X BEND WITHOUT SOCKET 30 DEGREE DN 250

LORO-X bend 30 degrees socketless DN 250

Description

LORO-XML bend, made of steel, hot-dip galvanized, without socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 30 degrees, DN250

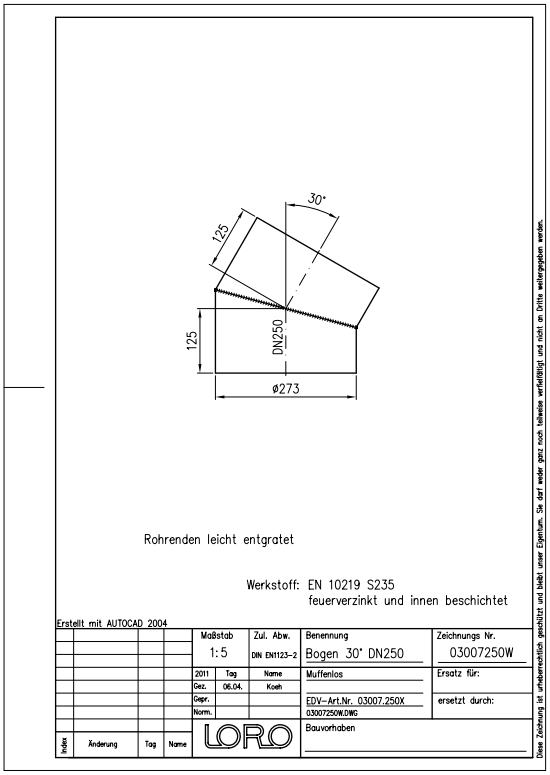

Données de l'article

Code EAN	**4038088069158**
Classe ETIM	**EC003024**
Diamètre nominal	**DN 250**
Longueur/degré nominal	**30**
Dimensions extérieures (HxLxP)	**273 x 317 x 301 mm**
Poids	**7,30 Kg (STK)**
Groupe de produits	**1**
Numéro tarifaire douanier	**73089098**
Matériau / Couleur	**Stahl feuerverzinkt, Silber**

Note d'utilisation

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Téléchargements

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)

Alles online