LORO-X BEND WITHOUT SOCKET 15 DEGREE DN 250

LORO-X bend 15 degrees socketless DN 250

Description

LORO-XML bend, made of steel, hot-dip galvanized, without socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 15 degrees, DN250

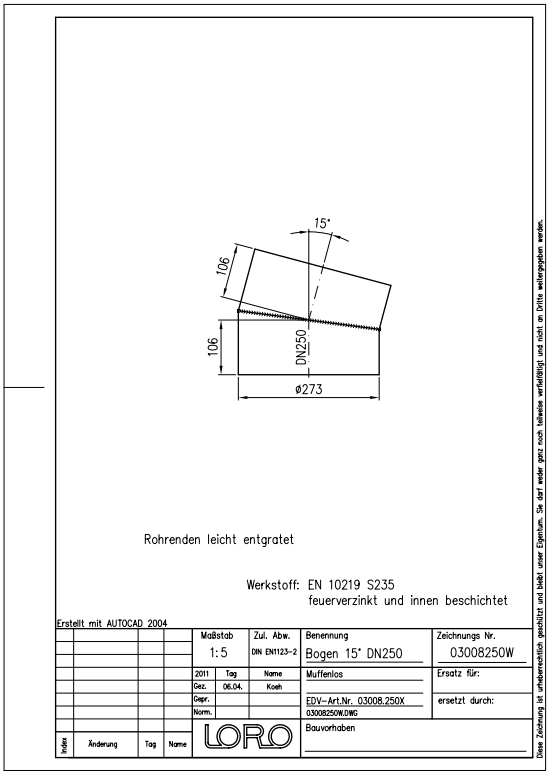

Article information

EAN Code	**4038088069172**
ETIM Class	**EC003024**
Nominal diameter	**DN 250**
Nominal length/degree	**15**
Outside measurements (HxWxL)	**273 x 296 x 244 mm**
Weight	**6,10 Kg (STK)**
Product group	**1**
Customs tariff number	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Usage note

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Downloads

Alles online

- Installation (PDF)
- Certificate (PDF)
- BIM IFC4 (parametrisch)
- CAD drawing (PDF)
- CAD 2D (DXF)
- Brochure (PDF)
- CAD (DWG)