LORO-X BEND WITHOUT SOCKET 15 DEGREE DN 250

LORO-X bend 15 degrees socketless DN 250

Beskrivelse

LORO-XML bend, made of steel, hot-dip galvanized, without socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 15 degrees, DN250

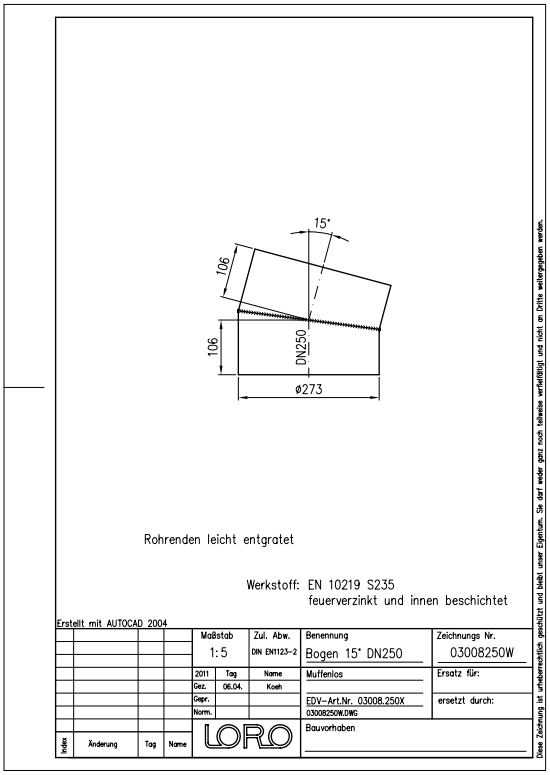

Artikkeldata

EAN-kode	4038088069172
ETIM-klasse	EC003024
Nominell diameter	DN 250
Nominell lengde/grad	15
Utvendige mål (HxBxL)	273 x 296 x 244 mm
Vekt	6,10 Kg (STK)
Produktgruppe	1
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Nedlastinger

Alles online

- Monteringsanvisning (PDF)
- Godkjenning (PDF)
- BIM IFC4 (parametrisch)
- Måltegning (PDF)
- CAD 2D (DXF)
- Brosjyre (PDF)
- CAD (DWG)