LORO-X BEND WITHOUT SOCKET 15 DEGREE DN 300

LORO-X bend 15 degrees socketless DN 300

Descrição

LORO-XML bend, made of steel, hot-dip galvanized, without socket, according to DIN EN 1123, with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 15 degrees, DN300

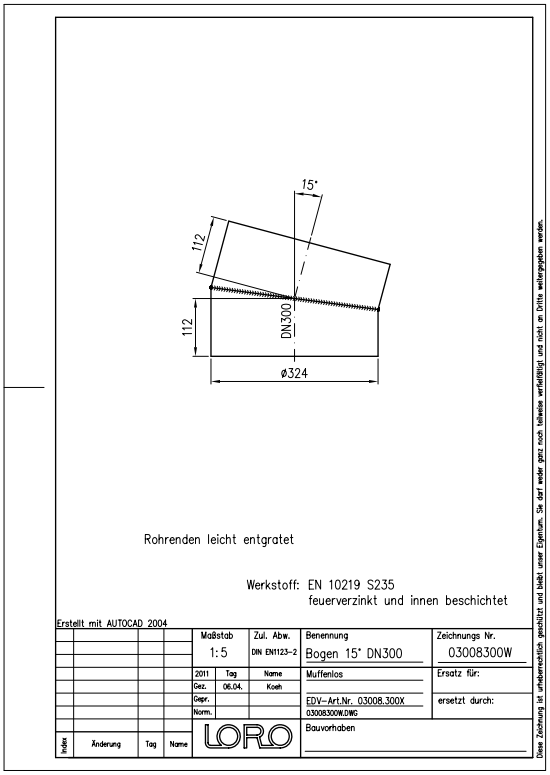

Dados do artigo

Código EAN	4038088069189
Classe ETIM	EC003024
Diâmetro nominal	DN 300
Comprimento/grau nominal	15
Medidas exteriores (AxLxP)	324 x 347 x 262 mm
Peso	7,80 Kg (STK)
Grupo de produtos	1
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Transferências

Alles online

Instruções de instalação (PDF)
Homologação (PDF)
BIM IFC4 (parametrisch)
Desenho cotado (PDF)
CAD 2D (DXF)
Brochura (PDF)
CAD (DWG)