
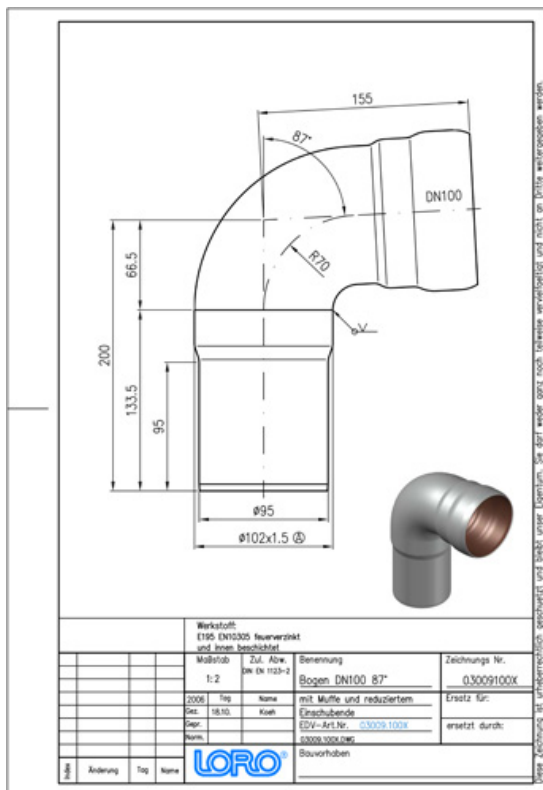


LORO-X BEND WITH REDUCED PIPE END

LORO-X bend 87 degrees with Red. connector DN 100

Popis

LORO-X reducing push-fit bend, made of steel, hot-dip galvanized, round, with socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 87 degrees, DN100



Údaje o artikli

EAN kód	4038088018897
ETIM trieda	EC003024
Menovitý priemer	DN 100
Menovitá dĺžka/stupeň	87
Vonkajšie rozmery (VxŠxH)	102 x 209 x 266 mm
Hmotnosť	1,90 Kg (STK)
Skupina produktov	1
Colný sadzovník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

LORO-X Red.-Steck Bogen mit Muffe und reduziertem Einschubende dienen dem Übergang von LORO-X Attikaabläufen (Muffe) in eine Red.-Steck Falleitung (reduziertes Einschubende).

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

BIM 3D (STEP)

[Rozmerový výkres \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Prospekt \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)