
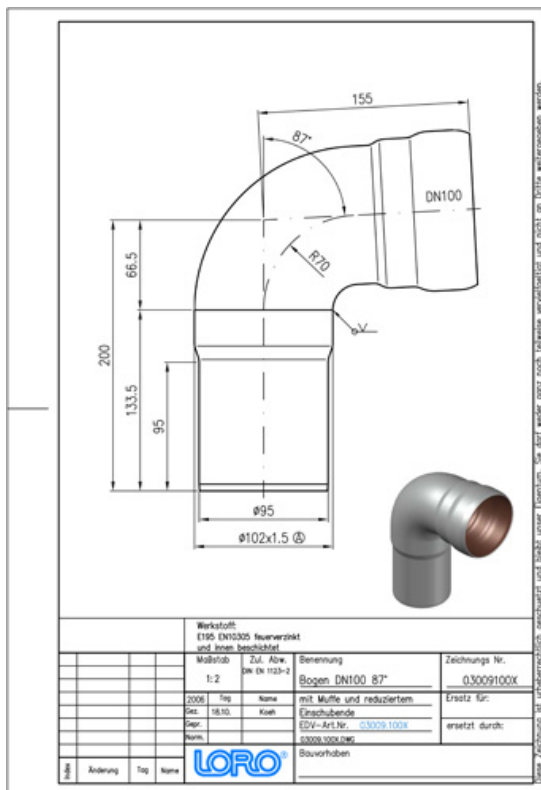


## LORO-X BEND WITH REDUCED PIPE END

LORO-X bend 87 degrees with Red. connector DN 100

### Beskrivelse

LORO-X reducing push-fit bend, made of steel, hot-dip galvanized, round, with socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 87 degrees, DN100



### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kode            | 4038088018897               |
| ETIM Klasse         | EC003024                    |
| Nominal diameter    | DN 100                      |
| Nominal længde/grad | 87                          |
| Ydermål (HxBxL)     | 102 x 209 x 266 mm          |
| Vægt                | 1,90 Kg (STK)               |
| Produktgruppe       | 1                           |
| Toldtarifnummer     | 73089098                    |
| Materiale / Farve   | Stahl feuerverzinkt, Silber |

### Brugsanvisning

LORO-X Red.-Steck Bogen mit Muffe und reduziertem Einschubende dienen dem Übergang von LORO-X Attikaabläufen (Muffe) in eine Red.-Steck Fallleitung (reduziertes Einschubende).

### Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måltægning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)