
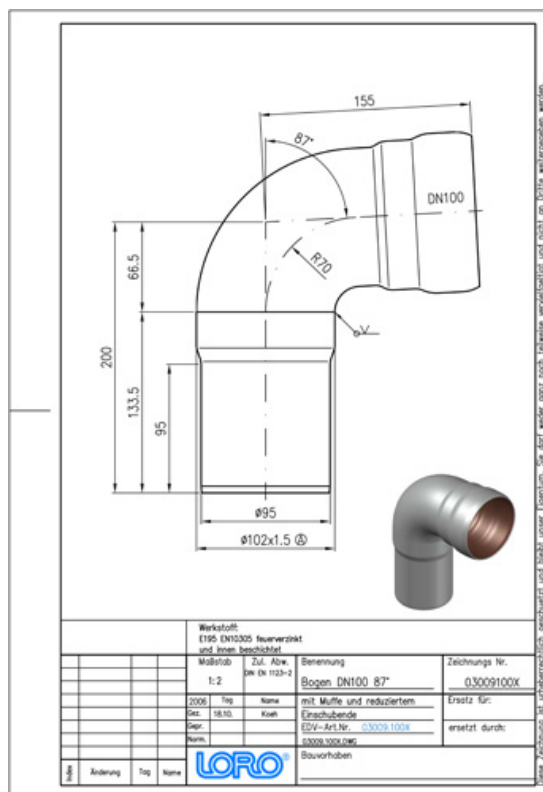


## LORO-X BEND WITH REDUCED PIPE END

### LORO-X bend 87 degrees with Red. connector DN 100

## Beskrivelse

LORO-X reducing push-fit bend, made of steel, hot-dip galvanized, round, with socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 87 degrees, DN100



## Artikkeldata

|                          |                             |
|--------------------------|-----------------------------|
| EAN-kode                 | 4038088018897               |
| ETIM-klasse              | EC003024                    |
| Nominell diameter        | DN 100                      |
| Nominell<br>lengde/grad  | 87                          |
| Utvendige mål<br>(HxBxL) | 102 x 209 x 266 mm          |
| Vekt                     | 1,90 Kg (STK)               |
| Produktgruppe            | 1                           |
| Tolltariffnummer         | 73089098                    |
| Materiale / Farge        | Stahl feuerverzinkt, Silber |

## Bruksanvisning

LORO-X Red.-Steck Bogen mit Muffe und reduziertem Einschubende dienen dem Übergang von LORO-X Attikaabläufen (Muffe) in eine Red.-Steck Falleitung (reduziertes Einschubende).

## Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

BIM 3D (STEP)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brosjyre \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)