

LORO-X STANDR.M.R-ÖFFN.F.ÜBERG.AUF 125MM

LORO-X standpipe with cleaning opening for transition to 125 mm DN 125

Description

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 125 mm outlet for transition to the underground pipe made of plastic pipe, 1000 mm, DN125




Article information

EAN Code	4038088085417
ETIM Class	EC011386
Nominal diameter	DN 125
Nominal length/degree	1000
Outside measurements (HxWxL)	152 x 172 x 1000 mm
Weight	8,50 Kg (STK)
Product group	2
Customs tariff number	73063018
Material / Color	Stahl feuerverzinkt, Silber

Usage note

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

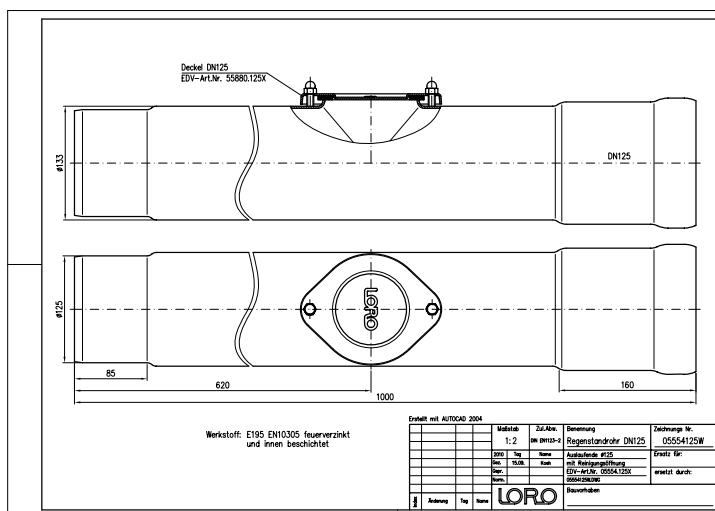

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

[CAD drawing \(PDF\)](#)

CAD 2D (DXF)

[Brochure \(PDF\)](#)

CAD (DWG)