

LORO-X STANDR.M.R-ÖFFN.F.ÜBERG.AUF 125MM

LORO-X standpipe with cleaning opening for transition to 125 mm DN 125

Beskrivning

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 125 mm outlet for transition to the underground pipe made of plastic pipe, 1000 mm, DN125




Artikeldata

EAN-kod	4038088085417
ETIM-klass	EC011386
Nominell diameter	DN 125
Nominell längd/grad	1000
Yttermått (HxBxL)	152 x 172 x 1000 mm
Vikt	8,50 Kg (STK)
Produktgrupp	2
Tullnummer	73063018
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

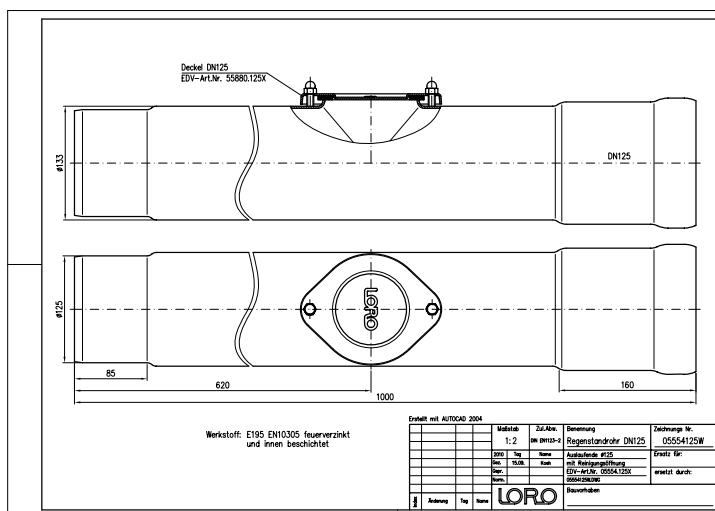

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[Måttitning \(PDF\)](#)

CAD 2D (DXF)

[Broschyr \(PDF\)](#)

CAD (DWG)