


LORO-X STANDR.M.R-ÖFFN.F.ÜBERG.AUF 125MM

LORO-X standpipe with cleaning opening for transition to 125 mm DN 125

Descrizione

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 125 mm outlet for transition to the underground pipe made of plastic pipe, 1000 mm, DN125

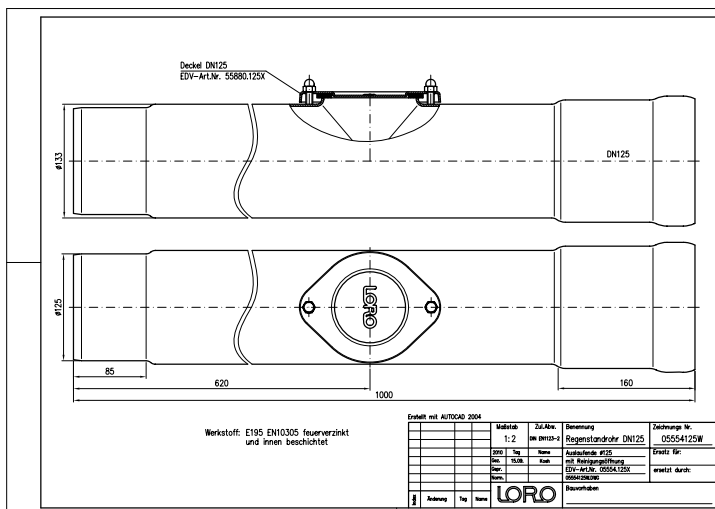

Date articol

Cod EAN	4038088085417
Clasă ETIM	EC011386
Diametru nominal	DN 125
Lungime/grad nominal	1000
Dimensiuni exterioare (ÎxLxA)	152 x 172 x 1000 mm
Greutate	8,50 Kg (STK)
Grupă de produse	2
Număr tarif vamal	73063018
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[Desen CAD \(PDF\)](#)

CAD 2D (DXF)

[Brosură \(PDF\)](#)

CAD (DWG)