


LORO-X STANDR.M.R-ÖFFN.F.ÜBERG.AUF 125MM

LORO-X standpipe with cleaning opening for transition to 125 mm DN 125

Opis

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 125 mm outlet for transition to the underground pipe made of plastic pipe, 1000 mm, DN125

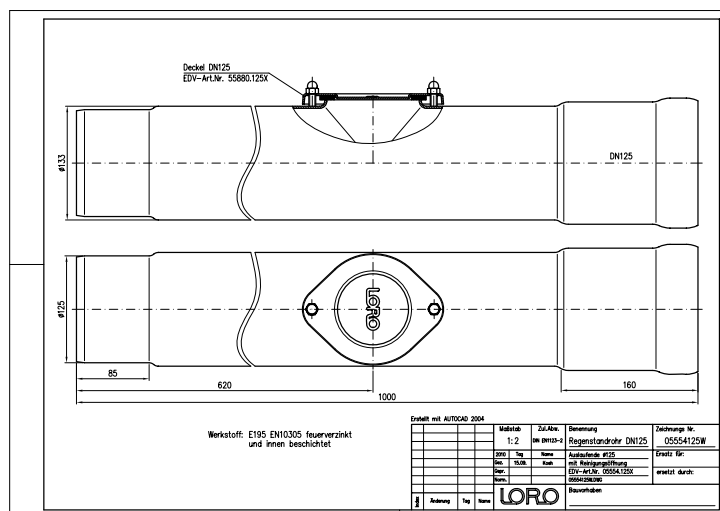

Podatki o izdelku

EAN koda	4038088085417
ETIM razred	EC011386
Nazivni premer	DN 125
Nazivna dolžina/stopinja	1000
Zunanje mere (VxŠxD)	152 x 172 x 1000 mm
Teža	8,50 Kg (STK)
Skupina izdelkov	2
Carinska tarifna številka	73063018
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)
[Certifikat \(PDF\)](#)

[Merska risba \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Prospekt \(PDF\)](#)
[CAD \(DWG\)](#)