


LORO-X STANDR.M.R-ÖFFN.F.ÜBERG.AUF 125MM

LORO-X standpipe with cleaning opening for transition to 125 mm DN 125

Popis

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 125 mm outlet for transition to the underground pipe made of plastic pipe, 1000 mm, DN125

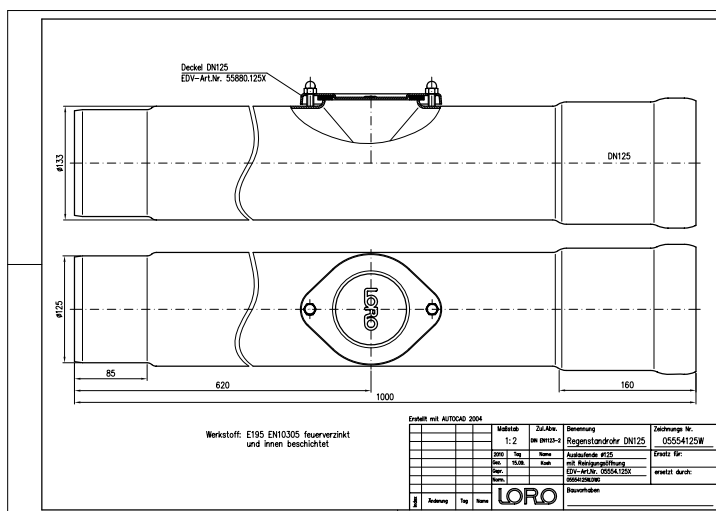

Údaje o artikli

EAN kód	4038088085417
ETIM trieda	EC011386
Menovitý priemer	DN 125
Menovitá dĺžka/stupeň	1000
Vonkajšie rozmery (VxŠxH)	152 x 172 x 1000 mm
Hmotnosť	8,50 Kg (STK)
Skupina produktov	2
Colný sadzobník	73063018
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Prospekt \(PDF\)](#)

[CAD \(DWG\)](#)