


LORO-X STANDR.M.R-ÖFFN.F.ÜBERG.AUF 125MM

LORO-X standpipe with cleaning opening for transition to 125 mm DN 125

Beschrijving

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 125 mm outlet for transition to the underground pipe made of plastic pipe, 1000 mm, DN125

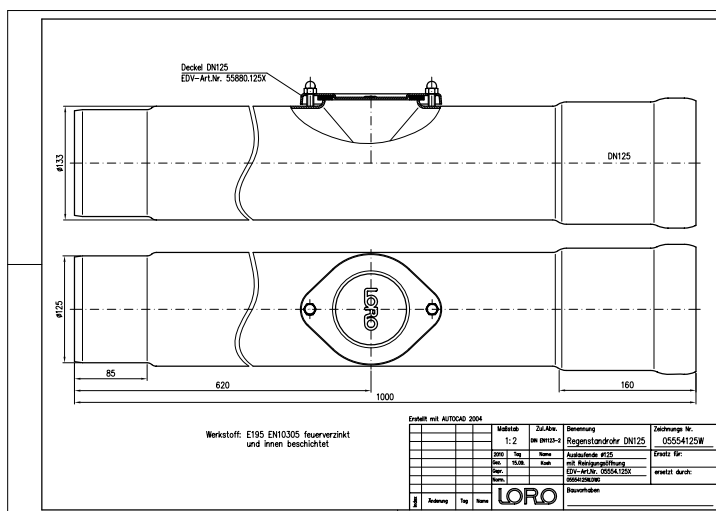

Artikelgegevens

EAN-code	4038088085417
ETIM Klasse	EC011386
Nominale diameter	DN 125
Nominale lengte/graad	1000
Buitenafmetingen (HxBxL)	152 x 172 x 1000 mm
Gewicht	8,50 Kg (STK)
Productgroep	2
Douanetariefnumme	73063018
r	
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaet \(PDF\)](#)

[Maattekening \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Brochure \(PDF\)](#)

[CAD \(DWG\)](#)