
LORO-X STANDR.M.R-ÖFFN.F.ÜBERG.AUF 125MM

LORO-X standpipe with cleaning opening for transition to 125 mm DN 125

Popis

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 125 mm outlet for transition to the underground pipe made of plastic pipe, 1000 mm, DN125



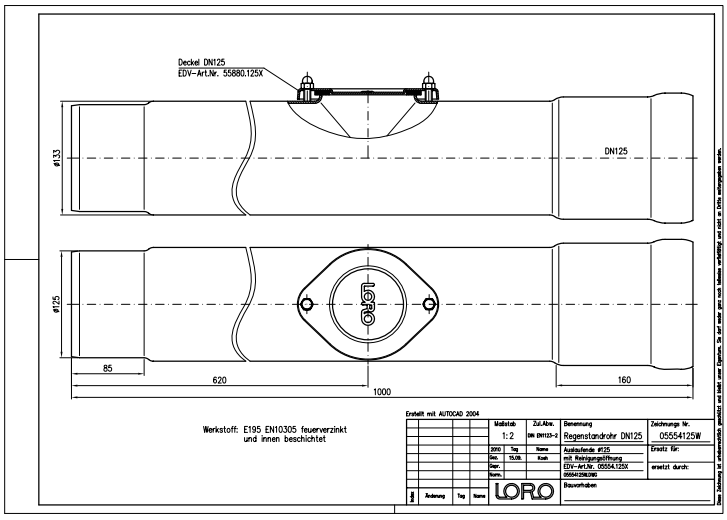

Údaje o artiklu

EAN kód	4038088085417
ETIM třída	EC011386
Jmenovitý průměr	DN 125
Jmenovitá délka/stupeň	1000
Vnější rozměry (VxŠxD)	152 x 172 x 1000 mm
Hmotnost	8,50 Kg (STK)
Skupina produktů	2
Celní sazebník	73063018
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Ke stažení

Alles online

Návod k instalaci (PDF)
Certifikát (PDF)
Výkres rozměrů (PDF)
CAD 2D (DXF)
Prospekt (PDF)
CAD (DWG)