


LORO-X STANDR.M.R-ÖFFN.F.ÜBERG.AUF 125MM

LORO-X standpipe with cleaning opening for transition to 125 mm DN 125

Descripción

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 125 mm outlet for transition to the underground pipe made of plastic pipe, 1000 mm, DN125

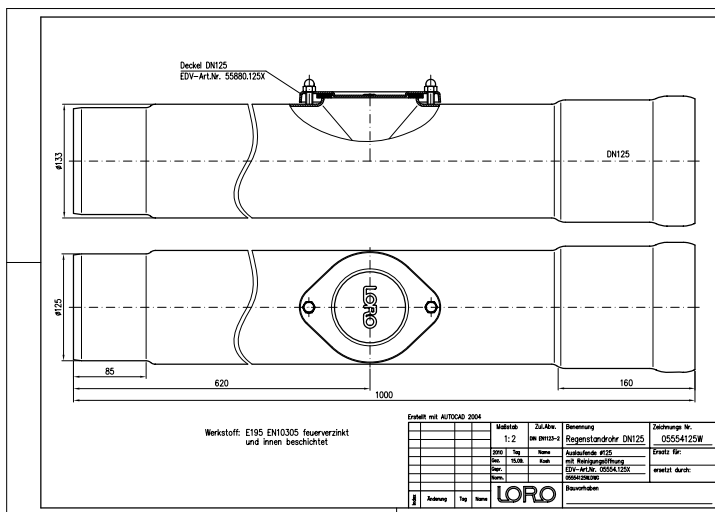

Datos del artículo

Código EAN	4038088085417
Clase ETIM	EC011386
Diámetro nominal	DN 125
Longitud/grado nominal	1000
Medidas exteriores (AxAxL)	152 x 172 x 1000 mm
Peso	8,50 Kg (STK)
Grupo de productos	2
Número de arancel aduanero	73063018
Material / Color	Stahl feuerverzinkt, Silber

Nota de uso

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)

Certificado (PDF)

[Dibujo dimensional \(PDF\)](#)

CAD 2D (DXF)

[Folleto \(PDF\)](#)

CAD (DWG)