


## LORO-X STANDR.M.R-DECK.AUSL.110,2000 MM

LORO-X standpipe with cleaning cover outlet 1102000 mm

### Beskrivning

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 2000 mm, DN100

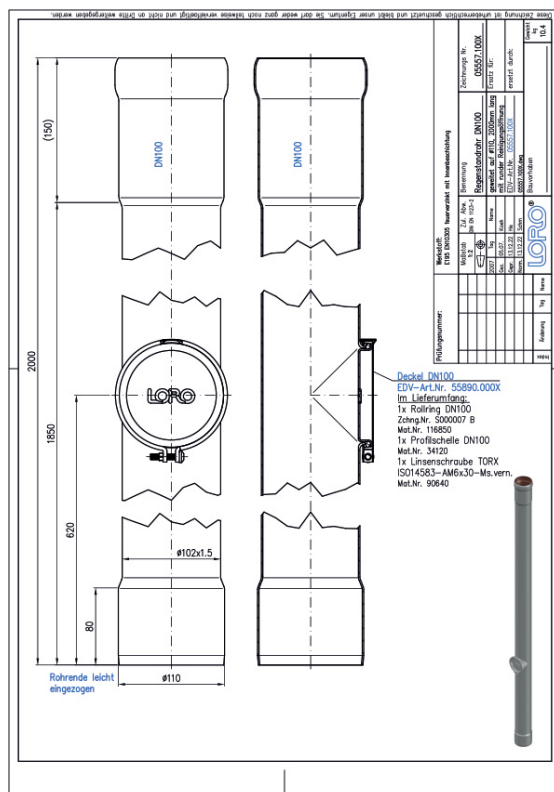

### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088082683               |
| ETIM-klass          | EC011386                    |
| Nominell diameter   | DN 100                      |
| Nominell längd/grad | 2000                        |
| Yttermått (HxBxL)   | 118 x 126 x 2000 mm         |
| Vikt                | 10,40 Kg (STK)              |
| Produktgrupp        | 2                           |
| Tullnummer          | 73063012                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

### Användningsanvisning

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkännande \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[Måttitning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Broschyr \(PDF\)](#)
[CAD 3D \(DWG\)](#)