

LORO-X STANDR.M.R-DECK.AUSL.110,500 MM

LORO-X Standpipe with cleaning cover outlet 110500 mm

Beskrivning

LORO-X renovation rain standpipe, made of steel, hot-dip galvanized, round, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, with 110 mm outlet for transition to the underground pipe made of cast iron pipe or to plastic pipe, 500 mm, DN100




Artikeldata

EAN-kod	4038088082676
ETIM-klass	EC011386
Nominell diameter	DN 100
Nominell längd/grad	500
Yttermått (HxBxL)	118 x 126 x 500 mm
Vikt	2,80 Kg (STK)
Produktgrupp	2
Tullnummer	73063012
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

LORO-X Sanierungsstandrohre sind am unteren Auslaufende für den direkten Anschluss an SML Rohre aufgeweitet (110mm bzw. 125mm), sodass sie direkt mit einem CV-/CE-Verbinder auf entsprechend abgetrennte Rohre montiert werden können.

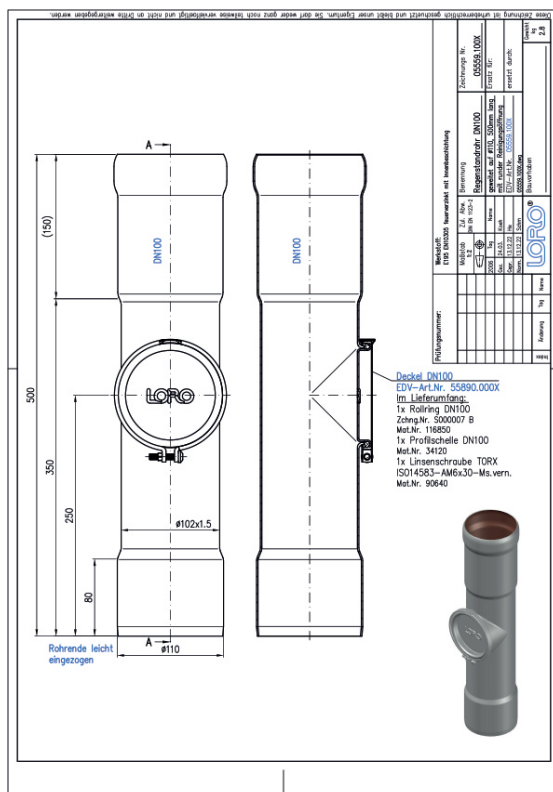

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkännande \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[Måttitning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Broschyr \(PDF\)](#)
[CAD 3D \(DWG\)](#)